

CATALOGUE

Walcom®

2024



WWW.WALMEC.COM

SPRAY GUNS

Genesi Carbonio 360 EVO HALO BASE	4
Genesi Carbonio 360 EVO HALO CLEAR	5
Genesi Carbonio 360 EVO HVLP	6
Genesi Carbonio 360 EVO GEO	7
Genesi Alluminio HALO BASE - HALO CLEAR - HVLP - GEO	8
Ego Carbonio 190 HALO - HVLP	9
Slim Kombat HALO	10
Slim Kombat HVLP	11
Slim XLight HALO	12
Slim XLight HVLP	13
Slim HALO	14
Slim HVLP	15
Grafo system	16

AUTOMATIC SPRAY GUNS

Matik HALO 3/4 - HVLP 3/4 - GEO 3/4	17
-------------------------------------	----

MAIN SPRAY GUN SPARE PARTS

ADC Kit (needle, nozzle, air cap) Genesi Carbonio EVO / Light	18
Air cap ring, Air cap Genesi Carbonio EVO / Light	18
ADC Kit (needle, nozzle, air cap) Genesi Alluminio	19
ADC Kit (needle, nozzle, air cap) Ego Carbonio	19
ADC Kit (needle, nozzle, air cap) Ego	19
ADC Kit (needle, nozzle, air cap) Slim Kombat	19
ADC Kit (needle, nozzle, air cap) Slim XLight	19
ADC Kit (needle, nozzle, air cap) Slim	20
ADC Kit (needle, nozzle, air cap) Genesi Top Line	20
ADC Kit (needle, nozzle, air cap) Matik	20
Spare parts box	21
Set of gaskets	21
Cups	22

COUPLINGS AND PLUGS

WHF - X300 - X300 U - X400	26
----------------------------	----

AIR PRESSURE REGULATOR FOR SPRAY GUNS

MR-DGT membrane regulator	27
Pressure regulator	28

PAINTING MASKS

EVO 360 Mask - spare parts	30
Spare parts - masks	31

PAINTING ACCESSORIES

Painting clothing	32
360 True Light EVO - 360 True Light Meter	33
Holder	34
Various	35
Hoses	37

FILTER SERIES

FSRD 4 EVO	39
FSRD 4 - FSRD 3 - FSRD 2 - FSRD	40
FCA - PFR - ERS EVO - ESR	41
MBR WALL - double mem. reg. - THK - filter spare parts	42

THERMODRY TECHNOLOGY

TD ³ PRO	44
TD ¹ PRO	44
THT	44
THC	45
THK	45
Double membrane regulator	45
Fan Jet Thermo	45
Hygrometric meter	45

FAN JET LINE

Fan Jet	46
Fan Jet magnetic	46
Fan Jet stand	46

ECODRY LINE

Ecody	47
Ecody light	47
Ecody stand	47









SPRAY GUN CLEANER

Easy/S	48
Easy/W	48

COMPRESSED AIR GUNS

IM BODY	49
AS/FG	49
PC/NS - FG	50
IA/L - FG	50
IA/BED LINER	50
IA/LU - FG	50
TS	50

Key ok the symbols used:

 body shop	 building	 touch-up
 industry	 woodworking	 D.I.Y.
 decoration	 paint type	

 **Spraygun weight is without cup and regulator.**

SPRAY GUN EVOLUTION



A history of over 70 years of activity makes Walmec one of the more long living companies, not only in the compressed air industry, but also in the whole national territory.

This is source of great pride for us, because it show how far can a company go, if it considers customers' satisfaction as its first goal. Behind all those years there are sacrifices all pur employees that have devoutly dedicated their time, passion, professionalism to our cause, there are ideas, chance but, above all, the strong will to never stop, from all of us.

Today we need to look further more than ever.

Markets are growing, evolving, demanding.

Companies have to satisfy all of the needs they dictate, needs that are not simply involving the creation of a new product or a fast service.

Innovation, quality, promptness are just the basic requisite for a company that wants to survive in nowadays market.

70 years old Walmec wants to amaze who believes that the productive future is only tied to certain areas by continuing to offer a 100% MADE IN ITALY product.

Amaze who believes that manufacturing technologies are already established by investing and renewing its equipment with constantly more advanced CNC, automate and incredibly precise.

Amaze who believes that you cannot go beyond some predetermined frameworks of products' constructive nature by exploring unused and charming roads, made of hyper technological and super performing materials.

To amaze is simply to think outside the box and to allow all the people that work with our products to find non just the quality, the price and the service that they righteously demand, but above all to try something completely unexpected, unthinkable, unpredictable.

Walmec is ready for it and we are sure that we together will keep innovating and manufacturing top quality products.



WWW.WALMEC.COM

GENESI CARBONIO 360 EVO HALO BASE

FIELD OF APPLICATION: SOLVENT AND WATERBORNE BASE COAT

HALO (High Atomization Low Overspray) by Walcom®, more than 20 years of experience with the most popular technology in the market, the paint system that combines adequate atomizing pressure and high transferred efficiency, certified by international independent laboratory and research institutes.

The B series air caps developed in collaboration with the paint companies, the 12-hole nozzle with diffuser and flexibility in the product and fan adjustment make it a real jewel in the application of the latest generation paint products.

GENESI CARBONIO 360 EVO HALO BASE is an excellent professional tool and these are some of the features:

- high atomization and product lay out,
- low air consumption 350 l/min at 2 bar / 12 cfm at 29 psi,
- compliant max 2 bar / 29 psi,
- certified transfer efficiency over 70%,
- integrated pressure regulator, with spray gun air inlet adjustment knob,
- quick connect/release digital pressure gauge,
- nozzle with special diffuser for air flow homogeneity,
- easy to adjust and versatility,
- carbon fiber for lightness and ergonomic design,
- excellent color match, certified by main paint companies,
- resistant to solvent and pickling chemicals,
- 340 g weight, the lightest on the market.



Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walcom.com/solutionfinder



MADE IN ITALY

TECHNICAL DATA

Body: forged aluminum and carbon fiber

Handle and trigger: carbon fiber

Air cap: anodized aluminum

Air cap ring: carbon fiber

Nozzle: stainless steel AISI 303

Needle-springs: stainless steel AISI 303

Seal gaskets: self-lubricating PTFE (teflon)





Weight: 340 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / compliant max 2 bar (29 psi)

Air consumption: 350 l/min at 2 bar / 12 cfm at 29 psi

Ø nozzle: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.7 - 1.9

GENESI CARBONIO 360 EVO HALO BASE

ITEM ID	COMPOSITION	PACKAGING	Recommended use
W0230**	Cup POM C 680 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	
W0235**	Cup aluminum 750 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	 BASE COAT
W0220**	Cup POM C 680 cc Integrated pressure regulator NO pressure gauge	■	
W0225**	Cup aluminum 750 cc Integrated pressure regulator NO pressure gauge	■	
W0265**	Spray gun only + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	Packaging  

Note:
add nozzle Ø to ITEM ID (**)

GENESI CARBONIO 360 EVO HALO CLEAR

FIELD OF APPLICATION: CLEAR COAT APPLICATION MS-HS UHS ACRYLICS

To offer greater efficiency and quality of coating, we have studied a specific version for clear.

HALO (High Atomization Low Overspray) CLEAR is equipped with a high atomization cap C, the new MP air cap is instead specific for the "mirror effect" of the clear, eliminating any form of orange peel.

The flexibility of the product adjustment allows the operator to find the right feeling in using this spray gun, to better enhance its incredible qualities.

GENESI CARBONIO 360 EVO HALO CLEAR is an excellent professional tool and these are some of the features:

- high atomization and product lay out,
- low air consumption 380 l/min at 2 bar / 13 cfm at 29 psi,
- compliant max 2 bar / 29 psi,
- certified transfer efficiency over 70%,
- integrated pressure regulator, with spray gun air inlet adjustment knob,
- quick connect/release digital pressure gauge,
- nozzle with special diffuser for air flow homogeneity,
- easy to adjust and versatility,
- carbon fiber for lightness and ergonomic design,
- excellent color match, certified by main paint companies,
- resistant to solvent and pickling chemicals,
- 340 g weight, the lightest on the market.



MADE IN ITALY

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solutionfinder



TECHNICAL DATA

Body: forged aluminum and carbon fiber

Handle and trigger: carbon fiber

Air cap: anodized aluminum

Air cap ring: carbon fiber

Nozzle: stainless steel AISI 303

Needle-springs: stainless steel AISI 303

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 340 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / compliant max 2 bar (29 psi)

Air consumption: 380 l/min at 2 bar / 13 cfm at 29 psi

Ø nozzle: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.7 - 1.9



MP Air cap
(add to ITEM ID /CMP)

GENESI CARBONIO 360 EVO HALO CLEAR

ITEM ID	COMPOSITION	PACKAGING	Recommended use
W0130**	Cup POM C 680 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	
W0135**	Cup aluminum 750 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	CLEAR COAT
W0120**	Cup POM C 680 cc Integrated pressure regulator NO pressure gauge	■	
W0125**	Cup aluminum 750 cc Integrated pressure regulator NO pressure gauge	■	
W0165**	Spray gun only + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	

Note:
add nozzle Ø to ITEM ID (**)

GENESI CARBONIO 360 EVO HVLP

FIELD OF APPLICATION: SOLVENT AND WATERBORNE BASE COATS

It's a perfect tool for waterborne base coats application and solvent based, color match master, air cap pressure 0.7 bar (10 psi) for a traditional HVLP as from California norm n. 1551 SCAQMD and more then 65% efficiency transfer rate.

It's very low in air consumption, 360 l/min /12 cfm, equal to LV (low volume) technology consequently saving air and energy.

GENESI CARBONIO 360 EVO HVLP is an excellent professional tool and these are some of the features:

- high atomization and product lay out for base coats,
- low air consumption 360 l/min a 2 bar/ 12 cfm at 29 psi : LV Technology,
- HVLP max 2 bar / 29 psi,
- certified transfer efficiency over 70%,
- integrated pressure regulator, with spray gun air inlet adjustment knob,
- quick connect/release digital pressure gauge,
- nozzle with special diffuser for airflow homogeneity,
- easy to adjust and versatility,
- carbon fiber for lightness and ergonomic design,
- excellent color match, certified by main paint companies,
- resistant to solvent and pickling chemicals,
- 340 g weight, the lightest on the market.



Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solutionfinder



MADE IN ITALY

TECHNICAL DATA

Body: forged aluminum and carbon fiber

Handle and trigger: carbon fiber

Air cap: anodized aluminum

Air cap ring: carbon fiber

Nozzle: stainless steel AISI 303

Needle-springs: stainless steel AISI 303

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 340 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / HVLP max 2 bar (29 psi)

Air consumption: 360 l/min at 2 bar / 12 cfm at 29 psi

Ø ugello: 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.9

GENESI CARBONIO 360 EVO HVLP

ITEM ID	COMPOSITION	PACKAGING	Recommended use
W0330**	Cup POM C 680 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	BASE COAT
W0335**	Cup aluminum 750 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	BASE COAT
W0320**	Cup POM C 680 cc Integrated pressure regulator NO pressure gauge	■	
W0325**	Cup aluminum 750 cc Integrated pressure regulator NO pressure gauge	■	
W0365**	Spray gun only + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	Packaging

Note:
add nozzle Ø to ITEM ID (**)

GENESI CARBONIO 360 EVO GEO

FIELD OF APPLICATION: WATERBORNE BASE AND SOLVENT CLEAR COAT

One of the masterpiece of the Walcom® brand, the GEO dual atomization system, hvlp in respect to the California norm n. 1151 SCAQMD with 0.7 bar at the air cap and more then 65% transfer efficiency, perfect for color match. The dual atomizing nozzle, 6 pre-atomizing holes, excellent product lay out, unique system that delivers incredible performance.

It's very low in air consumption 425 l/min / 15 cfm, saving air and consequently energy.

GENESI CARBONIO 360 EVO GEO is an excellent professional tool and these are some of the features:

- high atomization and product lay out for base coats,
- low air consumption 425 l/min at 2 bar / 15 cfm at 29 psi: LV technology,
- HVLP max 2 bar / 29 psi,
- certified transfer efficiency over 70%,
- integrated pressure regulator, with spray gun air inlet adjustment knob,
- quick connect/release digital pressure gauge,
- nozzle with special diffuser for airflow homogeneity,
- easy to adjust and versatility,
- carbon fiber for lightness and ergonomic design,
- excellent color match, certified by main paint companies,
- resistant to solvent and pickling chemicals,
- 340 g weight, the lightest on the market.



MADE IN ITALY

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solutionfinder



TECHNICAL DATA

Body: forged aluminum and carbon fiber

Handle and trigger: carbon fiber

Air cap: anodized aluminum

Air cap ring: carbon fiber

GEO nozzle: stainless steel AISI 303

Needle-springs: stainless steel AISI 303

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 340 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / HVLP max 2 bar (29 psi)

Air consumption: 425 l/min at 2 bar / 15 cfm at 29 psi

Ø ugello: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.9

GENESI CARBONIO 360 EVO GEO

ITEM ID	COMPOSITION	PACKAGING	Recommended use
W0430**	Cup POM C 680 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	BASE COAT
W0435**	Cup aluminum 750 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	BASE COAT
W0420**	Cup POM C 680 cc Integrated pressure regulator NO pressure gauge	■	
W0425**	Cup aluminum 750 cc Integrated pressure regulator NO pressure gauge	■	
W0465**	Spray gun only + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	Packaging

Note:
add nozzle Ø to ITEM ID (**)

GENESI ALLUMINIO HALO BASE - HALO CLEAR - HVLP - GEO

FIELD OF APPLICATION: WATER AND SOLVENT BASE MS-HS, UHS AND ACRYLIC CLEARS

The performance level of the GENESI line in the traditional anodized ALUMINUM version.

Extremely light (only 415 g), easy to handle and ergonomic, it is an ecological spray gun and resistant to any solvent.

Easy to use and clean, it is available in the versions for base HALO (High Atomization Low Overspray) BASE - HVLP - GEO and for clear HALO (High Atomization Low Overspray) CLEAR.

GENESI ALLUMINIO is characterized by:

- high atomization and product distension,
- low air consumption 350 l/min at 2 bar / 12 cfm at 29 psi HALO version,
- low air consumption 380-415 l/min at 2 bar /13-14 cfm at 29 psi HVLP-GEO version,
- 2 bar (29 psi) compliant HALO version,
- HVLP at 2 bar (29 psi) HVLP-GEO version,
- certified transfer efficiency, above 70%,
- ease and precision in adjusting the air, product, fan,
- weight 415 g, the lightest aluminum spray gun on the market.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solution_finder



MADE IN ITALY

TECHNICAL DATA

Body: anodized forged aluminum

Hat and ring: anodized aluminum

Nozzle: AISI 303 stainless steel

Needle-springs: AISI 303 stainless steel

Weight: 415 g

Operating pressure: HALO BASE/CLEAR= range 0.5 - 2 bar (7.2 - 29 psi) / compliant max 2 bar (29 psi),

HVLP/GEO= range 0.5 - 2 bar (7.2 - 29 psi) / HVLP max 2 bar (29 psi)

Air consumption: HALO= 350 l/min at 2 bar / 12 cfm at 29 psi,

HVLP-GEO= 380-415 l/min at 2 bar /13-14 cfm at 29 psi

Ø nozzle HALO BASE / CLEAR version: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.7 - 1.9

Ø nozzle HVLP version: 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.9

Ø nozzle GEO version: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.9

GENESI ALLUMINIO HALO BASE - HALO CLEAR - HVLP - GEO

ITEM ID	COMPOSITION	PACKAGING	Recommended use
W0630** HALO BASE	Cup POM C 680 cc + AL air inlet pressure regulator with pressure gauge	■	BASE COAT CLEAR COAT
W0635** HALO BASE	Cup aluminum 750 cc + AL air inlet pressure regulator with pressure gauge	■	***
W0530** HALO CLEAR	Cup POM C 680 cc + AL air inlet pressure regulator with pressure gauge	■	***
W0535** HALO CLEAR	Cup aluminum 750 cc + AL air inlet pressure regulator with pressure gauge	■	***
W0730** HVLP	Cup POM C 680 cc + AL air inlet pressure regulator with pressure gauge	■	
W0735** HVLP	Cup aluminum 750 cc + AL air inlet pressure regulator with pressure gauge	■	
W0830** GEO	Cup POM C 680 cc + AL air inlet pressure regulator with pressure gauge	■	
W0835** GEO	Cup aluminum 750 cc + AL air inlet pressure regulator with pressure gauge	■	

Packaging



Note:
add nozzle Ø to ITEM ID (**)

EGO CARBONIO 190 HALO - HVLP

FIELD OF APPLICATION: SMART REPAIR AND GRAPHICS

The process of total renewal and innovation of the range was integrated into the EGO, a spray gun dedicated to the refinish and smart repairs body shop. Thus, EGO CARBONIO 190 was born, forged aluminum core, over-injection body carbon fiber body, available in HALO (High Atomization Low Overspray) and HVLP versions.

Attention to every small detail, very light, easy to handle and, above all, excellent performance, EGO CARBONIO stands out for its characteristics that make it unique:

- weight, only 190 grams,
- performance, thanks to the high-precision components machined on 5-axis CNC machining;
- atomization, with the new anodized "anticorrosive" aluminum cap, designed specifically for a targeted, fine and precise application;
- strength and durability, obtained thanks to the mix of materials such as stainless steel, aluminum, brass and carbon fiber treated with nanotechnological processes for easier cleaning, and a safe resistance to chemical aggression.

EGO CARBONIO 190 represents the most sophisticated, from a design and production point of view, at the same time, it's easier and more practical for the painter to use. A unique spray gun capable of a wide range of application of its kind, in line with the Walcom® philosophy, based on innovation and technology.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solutionfinder



MADE IN ITALY

TECHNICAL DATA

Body: forged aluminum and carbon fiber

Trigger: carbon fiber

Air cap: anodized aluminum

Air cap ring: carbon fiber

Nozzle: stainless steel AISI 303

Needle-springs: stainless steel AISI 303

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 190 g




Operating air pressure: HALO= range 0,5 - 2 bar (7.2 - 29 psi) / compliant max 2 bar (29 psi),

HVLP= range 0,5 - 2 bar (7.2 - 29 psi) / HVLP max 2 bar (29 psi)

Air consumption: HALO=145 l/min a 2 bar / 5 cfm at 29 psi, HVLP 160 l/min a 2 bar / 5 cfm at 29 psi

Ø ugello: 0.5 - 0.7 - 1.0 - 1.2 - 1.4

EGO CARBONIO 190 HALO - HVLP

ITEM ID	COMPOSITION	PACKAGING	Recommended use
7030** HALO	Cup POM C 75/180 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	 
7035** HALO	Cup aluminum 125 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	
7130** HVLP	Cup POM C 75/180 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	
7135** HVLP	Cup aluminum 125 cc + Integrated pressure regulator and carbon fiber quick release/connection digital pressure gauge.	■	Packaging ■ 

Note:
add nozzle Ø to ITEM ID (**)

SLIM KOMBAT HALO

FIELD OF APPLICATION: PRIMERS, BASE COAT, CLEAR COAT AND INDUSTRIAL PAINTING

The revolutionary spray gun that breaks away from classic production schemes and features a MAGNESIUM body over-injected with KEVLAR® fiber (Pat. Pending).

The lightness of magnesium, combined with the compactness and resistance of Kevlar, give life to an spray gun weighing only 345 g, resistant to all types of solvents and strippers, with truly very high performance levels in terms of atomization, distension and product savings.

The HALO (High Atomization Low Overspray) version is ideal for base that require good atomization, wet-on-wet base, UV base, as well as for opaque and clear base thanks to the high quality level and reduced product consumption.

SLIM KOMBAT HALO is characterized by:

- excellent performance level,
- ideal for quality / UV / wet-on-wet primers,
- excellent for MS HS clear and base,
- compliant at 2 bar (29 psi),
- certified transfer efficiency greater than 70%,
- resistant to all types of solvents,
- very light, easy to handle and ergonomic.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmeccom.com/solutionfinder



MADE IN ITALY



TECHNICAL DATA

Body: die-casting magnesium and Kevlar fiber

Trigger: Kevlar fiber

Air cap: anodized aluminum

Air cap ring: Kevlar fiber

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 345 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / recommended at 2 bar (29 psi)

Air consumption: 265 l/min at 2 bar / 9 cfm at 29 psi

Ø nozzle **Gravity feed**: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2 - 2.5 **UV feed**: 1.1 - 1.2 - 1.3 - 1.4

Ø nozzle **Suction feed**: 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2

Ø nozzle **Pressure feed**: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2

SLIM KOMBAT HALO

ITEM ID	COMPOSITION	PACKAGING
8030**	Cup POM C 680 cc + Air inlet pressure regulator with pressure gauge	■
8030**UV	Cup POM C-UV 680 cc + Air inlet pressure regulator with pressure gauge	■
8035**	Cup aluminum 750 cc + Air inlet pressure regulator with pressure gauge	■
8020**	Cup POM C 680 cc SR (without air flow regulator)	■
8025**	Cup aluminum 750 cc SR (without air flow regulator)	■
8070**	Bayonet suction cup 1000 cc + Air inlet pressure regulator with pressure gauge	■
8072**	Bayonet suction cup 1000 cc SR (without air flow regulator)	■
8080**	SP - M 1/4" + Air inlet pressure regulator with pressure gauge	■
8080**-3/8	SP - M 3/8" + Air inlet pressure regulator with pressure gauge	■
8081**	SP - M 1/4" SR (without air flow regulator)	■
8081**-3/8	SP - M 3/8" SR (without air flow regulator)	■
8060**	Spray gun only /	■

Recommended use



BASE COAT
CLEAR COAT
PRIMER

Packaging



Note:
add nozzle Ø to ITEM ID (**)

SLIM KOMBAT HVLP

FIELD OF APPLICATION: PRIMERS, BASE COAT, CLEAR COAT AND INDUSTRIAL PAINTING

The revolutionary spray gun that breaks away from classic production schemes and features a MAGNESIUM body over-injected with KEVLAR® fiber (Pat. Pending).

The lightness of magnesium, combined with the compactness and resistance of Kevlar, give life to an spray gun weighing only 345 g, resistant to all types of solvents and strippers, with truly very high performance levels in terms of atomization, distension and product savings.

The HVLP version is ideal for base that require good atomization, wet-on-wet base, UV base, as well as for base thanks to the high quality level and reduced product consumption.

SLIM KOMBAT HVLP is characterized by:

- excellent performance level,
- ideal for quality / UV / wet-on-wet primers,
- excellent for base,
- HVLP at 2 bar (29 psi),
- certified transfer efficiency greater than 70%,
- resistant to all types of solvents,
- very light, easy to handle and ergonomic.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solution finder



MADE IN ITALY



TECHNICAL DATA

Body: die-casting magnesium and Kevlar fiber

Trigger: Kevlar fiber

Air cap: anodized aluminum

Air cap ring: Kevlar fiber

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 345 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / HVLP at 2 bar (29 psi)

Air consumption: 315 l/min at 2 bar / 11 cfm at 29 psi

Ø nozzle Gravity feed/ Pressure feed: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2 - 2.5 UV feed: 1.1 - 1.2 - 1.3 - 1.4

Ø nozzle Suction feed: 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2

SLIM KOMBAT HVLP

ITEM ID	COMPOSITION	PACKAGING
8130**	Cup POM C 680 cc + Air inlet pressure regulator with pressure gauge	■
8130**UV	Cup POM C-UV 680 cc + Air inlet pressure regulator with pressure gauge	■
8135**	Cup aluminum 750 cc + Air inlet pressure regulator with pressure gauge	■
8170**	Bayonet suction cup 1000 cc + Air inlet pressure regulator with pressure gauge	■
8180**	SP - M 1/4" + Air inlet pressure regulator with pressure gauge	■
8180**-3/8	SP - M 3/8" + Air inlet pressure regulator with pressure gauge	■
8160**	Spray gun only /	■

Note:
add nozzle Ø to ITEM ID (**)

Recommended use



BASE COAT
PRIMER

Packaging



SLIM XLIGHT HALO

FIELD OF APPLICATION: PRIMERS, BASE COAT, CLEAR COAT AND INDUSTRIAL PAINTING

The latest addition to the Slim family, Slim XLight combines the traditional reliability of this historic line with new solutions aimed at improving aesthetics, weight, cleanliness and, above all, performance.

The matt nickel plating, enriched by a unique laser cutting, offers a guarantee of sealing and durability, the new body, shaped and lightened, makes the spray gun more manageable.

The new nozzle, combined with the new air cap geometries, offer an unprecedented level of performance.

The HALO (High Atomization Low Overspray) version, thanks to all these features, becomes the ideal spray gun for all types of surfaces, including thick ones.

SLIM XLIGHT HALO is characterized by:

- lightness and easy handling,
- refined aesthetics and resistance to every type of solvent,
- excellent for all types of surfaces,
- can also be used for base and clear base.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solution_finder



MADE IN ITALY

TECHNICAL DATA

Body: chemically nickered aluminum - matte finishing

Trigger: PA & fiber glass

Air cap: anodized aluminum

Aircap ring: PA & fiber glass

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 455 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / recommended at 2 bar (29 psi)

Air consumption: 260 l/min at 2 bar / 9 cfm at 29 psi

Ø nozzle **Gravity feed**: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2 - 2.5

Ø nozzle **Suction feed**: 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2

Ø nozzle **Pressure feed**: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 / Ø nozzle **HD feed**: 1.3 - 1.5 - 1.7 - 1.9 - 2.2

SLIM XLIGHT HALO

ITEM ID	COMPOSITION	PACKAGING	Recommended use
8230**	Cup POM C 680 cc + Air inlet pressure regulator with pressure gauge	■	
8235**	Cup aluminum 750 cc + Air inlet pressure regulator with pressure gauge	■	
8220**	Cup POM C 680 cc SR (without air flow regulator)	■	
8225**	Cup aluminum 750 cc SR (without air flow regulator)	■	
8270**	Bayonet suction cup 1000 cc + Air inlet pressure regulator with pressure gauge	■	BASE COAT CLEAR COAT PRIMER
8272**	Bayonet suction cup 1000 cc SR (without air flow regulator)	■	*** HD
8280**	SP -M 1/4" + Air inlet pressure regulator with pressure gauge	■	*** HD
8280**-3/8	SP -M 3/8" + Air inlet pressure regulator with pressure gauge	■	
8281**	SP -M 1/4" SR (without air flow regulator)	■	
8281**-3/8	SP -M 3/8" SR (without air flow regulator)	■	
8240**	HD - Pressurised gravity cup POM C 680 cc Double spray gun air inlet pressure regulator and pressurised cup with pressure gauge	■ ***	

Packaging



SLIM XLIGHT HVLP

FIELD OF APPLICATION: PRIMERS, BASE COAT, CLEAR COAT AND INDUSTRIAL PAINTING

The latest addition to the Slim family, Slim XLight combines the traditional reliability of this historic line with new solutions aimed at improving aesthetics, weight, cleanliness and, above all, performance.

The matt nickel plating, enriched by a unique laser cutting, offers a guarantee of sealing and durability, the new body, shaped and lightened, makes the spray gun easier to handle.

The new nozzle, combined with the new air cap geometries, offers an unprecedented level of performance.

The HVLP version, thanks to all these features, becomes the ideal spray gun for all types of surfaces, including thick ones.

SLIM XLIGHT HVLP is characterized by:

- lightness and easy handling,
- refined aesthetics and resistance to every type of solvent,
- excellent for all types of surfaces,
- can also be used for base.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solution_finder



MADE IN ITALY

TECHNICAL DATA

Body: chemically nickered aluminum - matte finishing

Trigger: PA & fiber glass

Air cap: anodized aluminum

Aircap ring: PA & fiber glass

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 455 g

Operating air pressure: range 0.5 - 2.5 bar (7.2 - 36 psi) / HVLP at 2 bar (29 psi)

Air consumption: 295 l/min at 2 bar / 10 cfm at 29 psi

Ø nozzle **Gravity feed**: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2 - 2.5

Ø nozzle **Suction feed**: 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9 - 2.2

Ø nozzle **Pressure feed**: 1.0 - 1.1 - 1.2 - 1.3 - 1.4 - 1.5 - 1.7 - 1.8 - 1.9

SLIM XLIGHT HVLP

ITEM ID	COMPOSITION	PACKAGING	Recommended use
8330**	Cup POM C 680 cc + Air inlet pressure regulator with pressure gauge	■	
8335**	Cup aluminum 750 cc + Air inlet pressure regulator with pressure gauge	■	
8370**	Bayonet suction cup 1000 cc + Air inlet pressure regulator with pressure gauge	■	
8380**	SP -M 1/4" + Air inlet pressure regulator with pressure gauge	■	
8380** -3/8	SP -M 3/8" + Air inlet pressure regulator with pressure gauge	■	BASE COAT PRIMER

Note:
add nozzle Ø to ITEM ID (**)

Packaging



SLIM HALO

FIELD OF APPLICATION: PRIMERS, BASE COAT, CLEAR COAT AND INDUSTRIAL PAINTING

Tradition, reliability, compactness. For 25 years Slim has been synonymous with quality.

A spray gun that adapts to any type of paint, guaranteeing that result and performance that is required of a Walcom® spray gun, 100% Made in Italy.

The HALO (High Atomization Low Overspray) version, thanks to the high atomization cap, is suitable not only for any type of base, but also for opaque and clear base.

The SLIM HALO is characterized by:

- reliability and robustness,
- excellent level of product atomization,
- recommended for any type of base and clear base.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solution_finder



MADE IN ITALY

TECHNICAL DATA

Body: chemical nickel-plated polished aluminum

Air cap: chemical nickel-plated brass

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 535 g

Operating air pressure: 0.5 - 2.5 bar (7.2 - 36 psi) / recommended at 2 bar (29 psi)

Air consumption: 255 l/min at 2 bar / 9 cfm at 29 psi

Ø nozzle Gravity feed/ Suction feed: 1.0 - 1.2 - 1.3 - 1.5 - 1.7 - 1.9 - 2.2 - 2.5

Ø nozzle Pressure feed: 1.0 - 1.2 - 1.3 - 1.5 - 1.7 - 1.9 - 2.2

Ø nozzle HD feed: 1.3 - 1.5 - 1.7 - 1.9 - 2.2

SLIM HALO

ITEM ID	COMPOSITION	PACKAGING	Recommended use
10068**	Cup POM C 680 cc + Air inlet pressure regulator with pressure gauge	■	
10069**	Cup aluminum 750 cc + Air inlet pressure regulator with pressure gauge	■	
10083**	Cup POM C 680 cc SR (without air flow regulator)	■	
10084**	Cup aluminum 750 cc SR (without air flow regulator)	■	
10077**	Bayonet suction cup 1000 cc + Air inlet pressure regulator with pressure gauge	■	BASE COAT CLEAR COAT PRIMER
10088**	Bayonet suction cup 1000 cc SR (without air flow regulator)	■	*** HD
10078**	SP - M 1/4" + Air inlet pressure regulator with pressure gauge	■	*** HD
10078**-3/8	SP - M 3/8" + Air inlet pressure regulator with pressure gauge	■	
10089**	SP - M 1/4" SR (without air flow regulator)	■	
10089**-3/8	SP - M 3/8" SR (without air flow regulator)	■	
10080**	HD - Pressurised gravity cup POM C 680 cc Double spray gun air inlet pressure regulator and pressurised cup with pressure gauge	■ ***	

Note:
add nozzle Ø to ITEM ID (**)

SLIM HVLP

FIELD OF APPLICATION: PRIMERS, BASE COAT, CLEAR COAT AND INDUSTRIAL PAINTING

Tradition, reliability, compactness. For 25 years Slim has been synonymous with quality.

A spray gun that adapts to any type of paint, guaranteeing that result and performance that is required of a Walcom® spray gun, 100% Made in Italy.

The HVLP version, thanks to the high atomization cap, is suitable not only for any type of base, but also for opaque base.

The SLIM HVLP is characterized by:

- reliability and robustness,
- excellent level of product atomization,
- recommended for any type of base, matte base.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solution_finder



MADE IN ITALY

TECHNICAL DATA

Body: chemical nickel-plated polished aluminum

Air cap: chemical nickel-plated brass

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Seal gaskets: self-lubricating PTFE (teflon)

Weight: 535 g

Operating air pressure: 0.5 - 2.5 bar / HVLP at 2 bar / 7.2 - 36 psi / HVLP at 29 psi










Air consumption: 280 l/min at 2 bar / 10 cfm at 29 psi

Ø nozzle **Gravity feed:** 1.3 - 1.5 - 1.7 - 1.9 - 2.2

Ø nozzle **Suction feed:** 1.7 - 1.9 - 2.2

Ø nozzle **Pressure feed:** 1.0 - 1.3 - 1.5 - 1.7 - 1.9 - 2.2

SLIM HVLP

ITEM ID	COMPOSITION	PACKAGING	Recommended use
10060** 	Cup POM C 680 cc + Air inlet pressure regulator with pressure gauge	■	
10061** 	Cup aluminum 750 cc + Air inlet pressure regulator with pressure gauge	■	
10070** 	Bayonet suction cup 1000 cc + Air inlet pressure regulator with pressure gauge	■	
10071** 	SP -M 1/4" + Air inlet pressure regulator with pressure gauge	■	
10071**-3/8 	SP -M 3/8" + Air inlet pressure regulator with pressure gauge	■	BASE COAT PRIMER

Note:
add nozzle Ø to ITEM ID (**)

Packaging



GRAFO SYSTEM

FOR SPOT REPAIR AND PROFESSIONAL DECOR

Everything needed for the graphics and decoration professional.

From the specific spray gun for retouching, to the professional spray gun for any type of drawing, to the complete kit with everything needed for extremely high quality and precision work.

The experience and tradition of Walcom® in the world of graphics, enclosed in high-quality products, with attention to the reliability and precision of the workmanship of every single micro component that makes up these decorative jewels.

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



Check the correct setup of the spray gun here, or visit www.walmec.com/solutionfinder



MADE IN ITALY

ITEM ID DESCRIPTION

GRAFO BAG

39000/W Kit for professional decorator packed in suitcase

Featuring:

1 spray gun GRAPHIQUE

1 spray gun EGO CARBONIO HVLP Ø 0.7 with POM C gravity cup capacity 75 cc

1 needle-nozzle-air cap kit Ø 1.0 HVLP

1 DECOR KIT

1 air hose Ø 4x6 1.5 m with fittings

Weight: 1.915 Kg

Plastic suitcase



Recommended use



GRAPHIQUE

39003/W Professional double action spray gun designed for all graphic works and decoration

Body: nickel-plated brass

Nozzle: stainless steel

Needle-springs: stainless steel

Double cups - gravity cup in anodized aluminum capacity 4 cc; suction cup in glass capacity 20 cc

Featuring: fitting for hose Ø 4x6 - service spanner - support

Weight: 300 g

Operating air pressure: 0.5 - 3.5 bar / 7.2 - 50 psi

Air consumption: 10 - 25 l/min / 0.3 - 0.8 cfm



DECOR KIT

34500/W Ideal for the simultaneous use of more than one product with the EGO CARBONIO HALO/HVLP spray gun.

Featuring:

5 glass cups capacity 20 cc;

adaptor for EGO CARBONIO HALO/HVLP to be screwed on the body

Weight: 210 g



 In order to clean your spray gun more rapidly, we suggest that you reserve a cup for the diluent

IDEAL FOR WATERBORNE AND SOLVENT BASE, MS AND HS FOR INDUSTRIAL, WOODWORKING AND BODY SHOP

Innovative automatic spray gun for industrial painting.

With a new design, MATIK combines the high product atomization features with the needs typical of the automatic painting sector such as component durability and extreme maintenance ease.

In fact, MATIK combines highly atomizing caps, from the bodywork sector, with perfect needle interference on the nozzle which, with CNC machine processed body and components, guarantee efficiency, reliability and durability.

Available in the MATIK GEO versions, thus ecological with double atomization nozzle recommended for Car Refinish; MATIK HVLP, recommended for industrial and wood applications; MATIK HALO (High Atomization Low Overspray), the high transfer efficiency version with high atomization, ideal for any type of application.

MATIK is engineered for easy maintenance but at the same time to deliver the best available performance with micrometric paint flow adjustment, all the models are available with 3 or 4 controls (the difference is in the pneumatic return needle control).

Walcom®
SPRAY GUN EVOLUTION

CE Ex II 2G X



MADE IN ITALY

TECHNICAL DATA

Air and control inlets: with rotary quick couplings (M 1/4" double product inlet)

Body: extruded anodised aluminum

Air cap: nickel-plated brass

Nozzle: AISI 303 stainless steel

Needle-spring: stainless steel

Spring return needle closing

Seal gaskets: self-lubricating PTFE (teflon)

Fan and needle opening adjustments: micrometric and independent

Weight: 890 g Matik 3 version - 983 g Matik 4 version




Operating air pressure: 2 bar (29 psi)

Air consumption: 250 l/min / 8 cfm

Ø nozzle HALO/HVLP version: 0.8 - 1.0 - 1.2 - 1.4 - 1.7 Ø nozzle GEO version: 0.7 - 1.0 - 1.3 - 1.5 - 1.7



MATIK

ITEM ID	DESCRIPTION	PACKAGING	Recommended use
3280** HALO	Matik HALO 3	■	
3285** HALO	Matik HALO 4 + Pneumatic return needle closing	■	
3270** HVLP	Matik HVLP 3	■	
3275** HVLP	Matik HVLP 4 + Pneumatic return needle closing	■	
3260** GEO	Matik GEO 3	■	
3265** GEO	Matik GEO 4 + Pneumatic return needle closing	■	

Packaging



Note:
add nozzle Ø to ITEM ID (**)

MAIN SPRAY GUN SPARE PARTS

Walcom® original spare parts for a correct product maintenance are essential to keep the proper tool performance.

ADC Kit (needle - nozzle - air cap), SPB Kit the spare part box with the most frequent parts, Kit seals and springs (rebuild kit) included in each packaging or available separate.

A wide range of cups for spraygun, gravity, suction available in different materials and versions.

The new anti UV POM black cup, ideal solution for latest generation paint with fast drying times.



SPB SPARE PARTS BOX

All the main spare parts enclosed in a practical box, for safe and orderly maintenance.

ADC KIT

Needle, nozzle and air cap, essential spare parts for correct operation of the spray gun, in convenient and safe plastic boxes.

CUPS

Complete range of POM C, aluminum, pressurised, upper and lower cups.

ANTI UV CUP

The use of a specific compound during the injection process, prevents UV rays to penetrate the cup and it represent the perfect solution for the new fast drying paint materials.

PACKAGING

All our products are packed in cardboard box, plastic case or blister, with a bar code system and item id number.

Delicate spare parts are carefully packed to avoid any transport damages.

ORIGINAL

We recommend using only original spare parts for a proper and efficient functionality of our products.

The usage of not original spare parts can create malfunctioning but also damage the product itself.

COMPATIBILITY

Always replace with part specific for your model. If the thread is the same dimension, it could be not compatible with your product by default.

Not using the proper part may seriously compromise the performance of your product.

The ADC KIT contains needle-nozzle-air cap for the following models:

ADC KIT Genesi Carbonio 360 EVO/LIGHT - HALO

GENESI
CARBONIO
360
EVO/LIGHT

ITEM ID	Ø	ITEM ID	Ø	ITEM ID	Ø
BASE		CLEAR		CLEAR-CMP	
W020010	1.0	/	/	/	/
W020011	1.1	W010011	1.1	W010011/CMP	1.1
W020012	1.2	W010012	1.2	W010012/CMP	1.2
W020013	1.3	W010013	1.3	W010013/CMP	1.3
W020014	1.4	W010014	1.4	W010014/CMP	1.4
W020017	1.7	W010017	1.7	W010017/CMP	1.7
W020019	1.9	W010019	1.9	W010019/CMP	1.9

ADC KIT Genesi Carbonio 360 EVO/LIGHT HVLP

ITEM ID	Ø
W030011	1.1
W030012	1.2
W030013	1.3
W030014	1.4
W030015	1.5
W030017	1.7
W030019	1.9

ADC KIT Genesi Carbonio 360 EVO/LIGHT GEO

ITEM ID	Ø
W040010	1.0
W040011	1.1
W040012	1.2
W040013	1.3
W040014	1.4
W040015	1.5
W040017	1.7
W040019	1.9

AIR CAP RING-AIR CAP exclusively for Genesi Carbonio 360 EVO/LIGHT

Genesi Carbonio 360 EVO/LIGHT - HALO

GENESI
CARBONIO
360
EVO/LIGHT

ITEM ID	Ø	ITEM ID	Ø	ITEM ID	Ø
BASE		CLEAR		CLEAR-CMP	
W020510	1.0	/	/	/	/
W020511	1.1	W010511	1.1	W010511/CMP	1.1
W020512	1.2	W010512	1.2	W010512/CMP	1.2
W020513	1.3	W010513	1.3	W010513/CMP	1.3
W020514	1.4	W010514	1.4	W010514/CMP	1.4
W020517	1.7	W010517	1.7	W010517/CMP	1.7
W020519	1.9	W010519	1.9	W010519/CMP	1.9

Genesi Carbonio 360 EVO/LIGHT HVLP

ITEM ID	Ø
W030511	1.1
W030512	1.2
W030513	1.3
W030514	1.4
W030515	1.5
W030517	1.7
W030519	1.9

Genesi Carbonio 360 EVO/LIGHT GEO

ITEM ID	Ø
W040510	1.0
W040511	1.1
W040512	1.2
W040513	1.3
W040514	1.4
W040515	1.5
W040517	1.7
W040519	1.9

SPARE PARTS

GENESI
ALLUMINIO

ADC KIT Genesi Alluminio - HALO

ITEM ID	Ø	ITEM ID	Ø
BASE		CLEAR	
W060010	1.0	W050010	1.0
W060011	1.1	W050011	1.1
W060012	1.2	W050012	1.2
W060013	1.3	W050013	1.3
W060014	1.4	W050014	1.4
W060017	1.7	W050017	1.7
W060019	1.9	W050019	1.9

ADC KIT Genesi Alluminio HVLP

ITEM ID	Ø
W070011	1.1
W070012	1.2
W070013	1.3
W070014	1.4
W070015	1.5
W070017	1.7
W070019	1.9

ADC KIT Genesi Alluminio GEO

ITEM ID	Ø
W080010	1.0
W080011	1.1
W080012	1.2
W080013	1.3
W080014	1.4
W080015	1.5
W080017	1.7
W080019	1.9

EGO
CARBONIO

EGO

ADC KIT Ego Carbonio

ITEM ID	Ø	ITEM ID	Ø
HALO		HVLP	
700005	0.5	710005	0.5
700007	0.7	710007	0.7
700010	1.0	710010	1.0
700012	1.2	710012	1.2
700014	1.4	710014	1.4

ADC KIT Ego

ITEM ID	Ø	ITEM ID	Ø
HALO		HVLP	
410005	0.5	41370	0.5
410007	0.7	41371	0.7
410010	1.0	41372	1.0
410012	1.2	41373	1.2
410014	1.4	41374	1.4

SLIM
KOMBAT

ADC KIT Slim Kombat S-I-SP HALO/HALO SR

ITEM ID	Ø
800010	1.0*
800011	1.1*
800012	1.2*
800013	1.3
800014	1.4
800015	1.5
800017	1.7
800018	1.8
800019	1.9
800022	2.2
800025	2.5**

ADC KIT Slim Kombat S-I-SP HVLP

ITEM ID	Ø
810010	1.0*
810011	1.1*
810012	1.2*
810013	1.3
810014	1.4
810015	1.5
810017	1.7
810018	1.8
810019	1.9
810022	2.2
810025	2.5**

* Ø 1.0 - 1.1 - 1.2 NO version I

** Ø 2.5 NO version I and SP

Slim Kombat UV

Ø available: Ø 1.1 - 1.2 - 1.3 - 1.4

SLIM
XLIGHT

ADC KIT Slim XLight S-I-SP-HD HALO/HALO SR

ITEM ID	Ø
820010	1.0*
820011	1.1*
820012	1.2*
820013	1.3
820014	1.4
820015	1.5
820017	1.7
820018	1.8
820019	1.9
820022	2.2**
820025	2.5***

ADC KIT Slim XLight S-I-SP HVLP

ITEM ID	Ø
830010	1.0*
830011	1.1*
830012	1.2*
830013	1.3
830014	1.4
830015	1.5
830017	1.7
830018	1.8
830019	1.9
830022	2.2**
830025	2.5***

* Ø 1.0 - 1.1 - 1.2 NO version I

** Ø 2.2 NO version SP

*** Ø 2.5 NO version I and SP

Ø available: 1.3 - 1.5 - 1.7 - 1.9 - 2.2

SPARE PARTS

SLIM

ADC KIT Slim S-I-SP HALO/HALO SR Slim HD

ITEM ID	Ø
1135210	1.0*
1135212	1.2*
1135213	1.3
1135215	1.5
1135217	1.7
1135219	1.9
1135222	2.2
1135225	2.5**

KIT ADC Slim S-I-SP HVLP

ITEM ID	Ø
1135010	1.0*
1135013	1.3**
1135015	1.5**
1135017	1.7
1135019	1.9
1135022	2.2

Slim HALO

* Ø 1.0 - 1.2 NO version HD

** Ø 2.5 NO version SP and HD

Slim HVLP

* Ø 1.0 NO version S and I

** Ø 1.3 - 1.5 NO version I

GENESI
TOP LINE

ADC KIT Genesi Top Line HALO

ITEM ID	Ø
956010	1.0
956012	1.2
956013	1.3
956014	1.4
956017	1.7
956019	1.9

ADC KIT Genesi Top Line HVLP

ITEM ID	Ø
946010	1.0
946012	1.2
946013	1.3
946014	1.4
946017	1.7
946019	1.9

ADC KIT Genesi Top Line GEO

ITEM ID	Ø
936010	1.0
936013	1.3
936015	1.5
936017	1.7
936019	1.9

AUTOMATIC
SPRAY GUNS

ADC KIT Matik HALO 3-4

ITEM ID	Ø
375508	0.8
375510	1.0
375512	1.2
375514	1.4
375517	1.7

ADC KIT Matik HVLP 3-4

ITEM ID	Ø
375408	0.8
375410	1.0
375412	1.2
375414	1.4
375417	1.7

ADC KIT Matik GEO 3-4

ITEM ID	Ø
375307	0.7
375310	1.0
375313	1.3
375315	1.5
375317	1.7

SPARE PARTS

SPB - SPARE PARTS BOX

Plastic packaging containing the parts most subject to wear in the spray gun; 16 spare parts that assist the user's work. Reference, n°pieces and position in spare parts diagram are indicated in the box with a numbered grid that guides the professional searching for the required spare part.

ITEM ID	DESCRIPTION
90198	Spare parts box GENESI CARBONO EVO
90185	Spare parts box GENESI CARBONO LIGHT
90199	Spare parts box GENESI ALLUMINIO
90141	Spare parts box GENESI TOP LINE
90189/HALO	Spare parts box SLIM KOMBAT / SLIM XLIGHT HALO
90189/HVLP	Spare parts box SLIM KOMBAT / SLIM XLIGHT HVLP
90139	Spare parts box SLIM
90195	Spare parts box EGO CARBONIO
90143	Spare parts box EGO

Size: L 24 x P 18 x H 3.5 cm

Weight: 480 g Genesi Carbonio Evo-Light/ Genesi Top Line - 460 g Genesi Alluminio - 437 g Slim Kombat/Slim XLight/ Slim - 378 g Ego/ Ego Carbonio



SET OF GASKETS

Set of gaskets includes: springs, rod, air valve for spray guns.

ITEM ID	DESCRIPTION
40782	GENESI CARBONO set of gaskets
40784	GENESI CARBONO LIGHT/EVO set of gaskets
1011270	GENESI TOP LINE set of gaskets
40783/HALO	SLIM KOMBAT / SLIM XLIGHT HALO set of gaskets
40783/HVLP	SLIM KOMBAT / SLIM XLIGHT HVLP set of gaskets
40761	SLIM set of gaskets
40824	EGO CARBONIO HALO/HVLP set of gaskets
1011262	EGO set of gaskets
40816	MATIK set of gaskets



N.B.
IMAGE NOT
REPRESENTATIVE

ADAPTOR

Made of nickel-plated brass to fit the new 680 cc POM C cup for Genesi (ITEM ID 52028/B - 52028/F - 52028/UV) with spray guns Slim - Slim XLight.

ITEM ID	DESCRIPTION
52018	Adaptor



SPARE PARTS

GRAVITY CUPS

ITEM ID DESCRIPTION

POM C 680 cc

52028/B 680 cc POM C gravity cup - Weight: 170 g

Ø 9 product passage hole - M 16x1.5 thread

Valid for models:

GENESI CARBONIO EVO/LIGHT - GENESI ALLUMINIO - GENESI TOP LINE - SLIM KOMBAT



NYLON 680 cc

52028/F Nylon clear smoke effect cup 680 cc - Weight 147 g

Ø 9 product passage hole - M 16x1.5 thread

Valid for models:

GENESI CARBONIO EVO/LIGHT - GENESI ALLUMINIO - GENESI TOP LINE - SLIM KOMBAT



POM C 680 cc UV

52028/UV POM C plastic grey cup anti UV 680 cc - Weight 170 g

Ø 9 product passage hole - M 16x1.5 thread

Valid for models:

GENESI CARBONIO EVO/LIGHT - GENESI ALLUMINIO - GENESI TOP LINE - SLIM KOMBAT



POM C 680 cc

52010/W 680 cc POM C gravity cup - Weight: 170 g

52010/UV POM C plastic grey cup anti UV 680 cc - Weight 170 g

Ø 6.8 product passage hole - M 12x1 thread

Valid for models:

SLIM XLIGHT - SLIM - EGO CARBONIO - EGO



POM C 75 - 180 cc

52015/W 75 cc POM C gravity cup - Weight: 50 g

52014/W 180 cc POM C gravity cup - Weight: 100 g

52014/UV POM C plastic grey cup anti UV 180 cc - Weight 100 g

Valid for models:

EGO CARBONIO - EGO - SLIM XLIGHT - SLIM



UV KIT

Specific kit for using Walcom® spray guns with UV products, consisting of:

- 680 cc POM C cup with dark gray UV-shielded finish;

- UV-shielded black PVC air cap protection to avoid catalysis of product residue in the passage duct.

52070 Valid for **SLIM KOMBAT** model

52071 Valid for **GENESI CARBONIO EVO / LIGHT - GENESI ALLUMINIO** model

52072 Valid for **EGO CARBONIO** model

52073 Valid for **SLIM / SLIM XLIGHT** model



SPARE PARTS

GRAVITY CUPS

ITEM ID DESCRIPTION

ALUMINIUM 750 cc

52008/W 750 cc aluminum gravity cup - Weight: 158 g

Valid for models:

GENESI CARBONIO EVO/LIGHT - GENESI ALLUMINIO - GENESI TOP LINE - SLIM KOMBAT



ALUMINIUM 750 cc

52005/W 750 cc aluminum gravity cup - Weight: 158 g

Valid for models:

SLIM XLIGHT - SLIM - EGO CARBONIO - EGO



ALUMINIUM 500 cc

52007/W 500 cc aluminum gravity cup - Weight: 116 g

Valid for models:

SLIM XLIGHT - SLIM - EGO CARBONIO - EGO



ALUMINIUM 125 cc

52016/W 125 cc aluminum gravity cup - Weight: 65 g

Valid for models:

EGO CARBONIO - EGO - SLIM XLIGHT - SLIM



CUPS mod. GRAPHIQUE

52039 20 cc glass suction cup - Weight 30 g

51040/W 4 cc anodized aluminum gravity cup - Weight 10 g



SPARE PARTS

SUCTION CUP- CAMLOCK AND BAYONER CUPS FOR SUCTION SPRAY GUNS

ITEM ID DESCRIPTION

CAMLOCK 1000 CC

51008/W 1000 cc complete anodized aluminum suction cup with cover - Weight: 428 g

20100102083 1000 cc anodized aluminum suction cup only - Weight: 225 g

90119/W Set of camlock cup gaskets (5 pieces)

Valid for models:

GENESI TOP LINE



CAMLOCK 1000 CC

51012/W 1000 cc complete anodized aluminum suction cup with cover - Weight: 450 g

20100102083 1000 cc anodized aluminum suction cup only - weight: 225 g

90119/W Set of camlock cup gaskets (5 pieces)

Valid for models:

SLIM KOMBAT - SLIM XLIGHT- SLIM



BAYONET 1000 CC

51007 1000 cc complete anodized aluminum suction cup with cover - Weight: 357 g

20100568083 1000 cc anodized aluminum suction cup only - Weight: 155 g

90120/W Set of bayonet cup gaskets (5 pieces)

Valid for models:

SLIM KOMBAT - SLIM XLIGHT- SLIM



PRESSURIZED GRAVITY CUP- FOR HIGH-DENSITY PRODUCTS

ITEM ID DESCRIPTION

PRESSURIZED GRAVITY CUP

52055/W 680 cc POM C gravity cup set complete with air flow regulator with gauge.
For high density products like: latex, polyurethanes, gel coat,
thixotropic products etc. - Weight 560 g

Valid for models:

GENESI CARBONIO - GENESI TOP LINE - SLIM KOMBAT - GENESI ALLUMINIO



PRESSURIZED GRAVITY CUP

52054/W 680 cc POM C gravity cup set complete with air flow regulator with gauge.
For high density products like: latex, polyurethanes, gel coat,
thixotropic products etc. - Weight 560 g


52053/W 750 cc aluminum cup version - Weight: 580 g

Valid for models: **SLIM XLIGHT - SLIM**




COUPLINGS AND PLUGS

QUICK COUPLING FLOW DIAGRAM WITH 1 bar / 14 psi

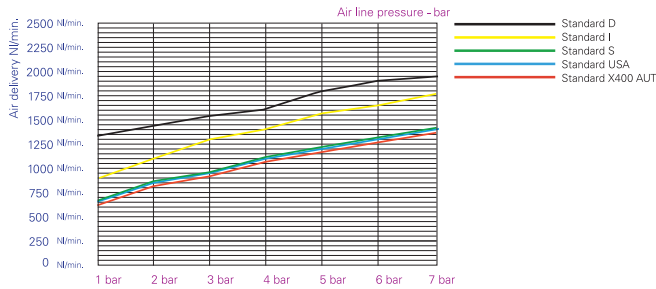

TECHNICAL SPECIFICATIONS:

Professional coupling and plugs and high air flow fittings for body shop use. Japanese (diam. 9.0 mm) and German (diam. 7.4 mm) standards guarantee constant air flow between hose and spray gun, without choking, and air flow over 1.500 l/min at 6 bar / 52 cfm at 87 psi. Operating air pressure: 0 - 16 bar / 0 - 232 psi Working temperature: -40°C + 80°C

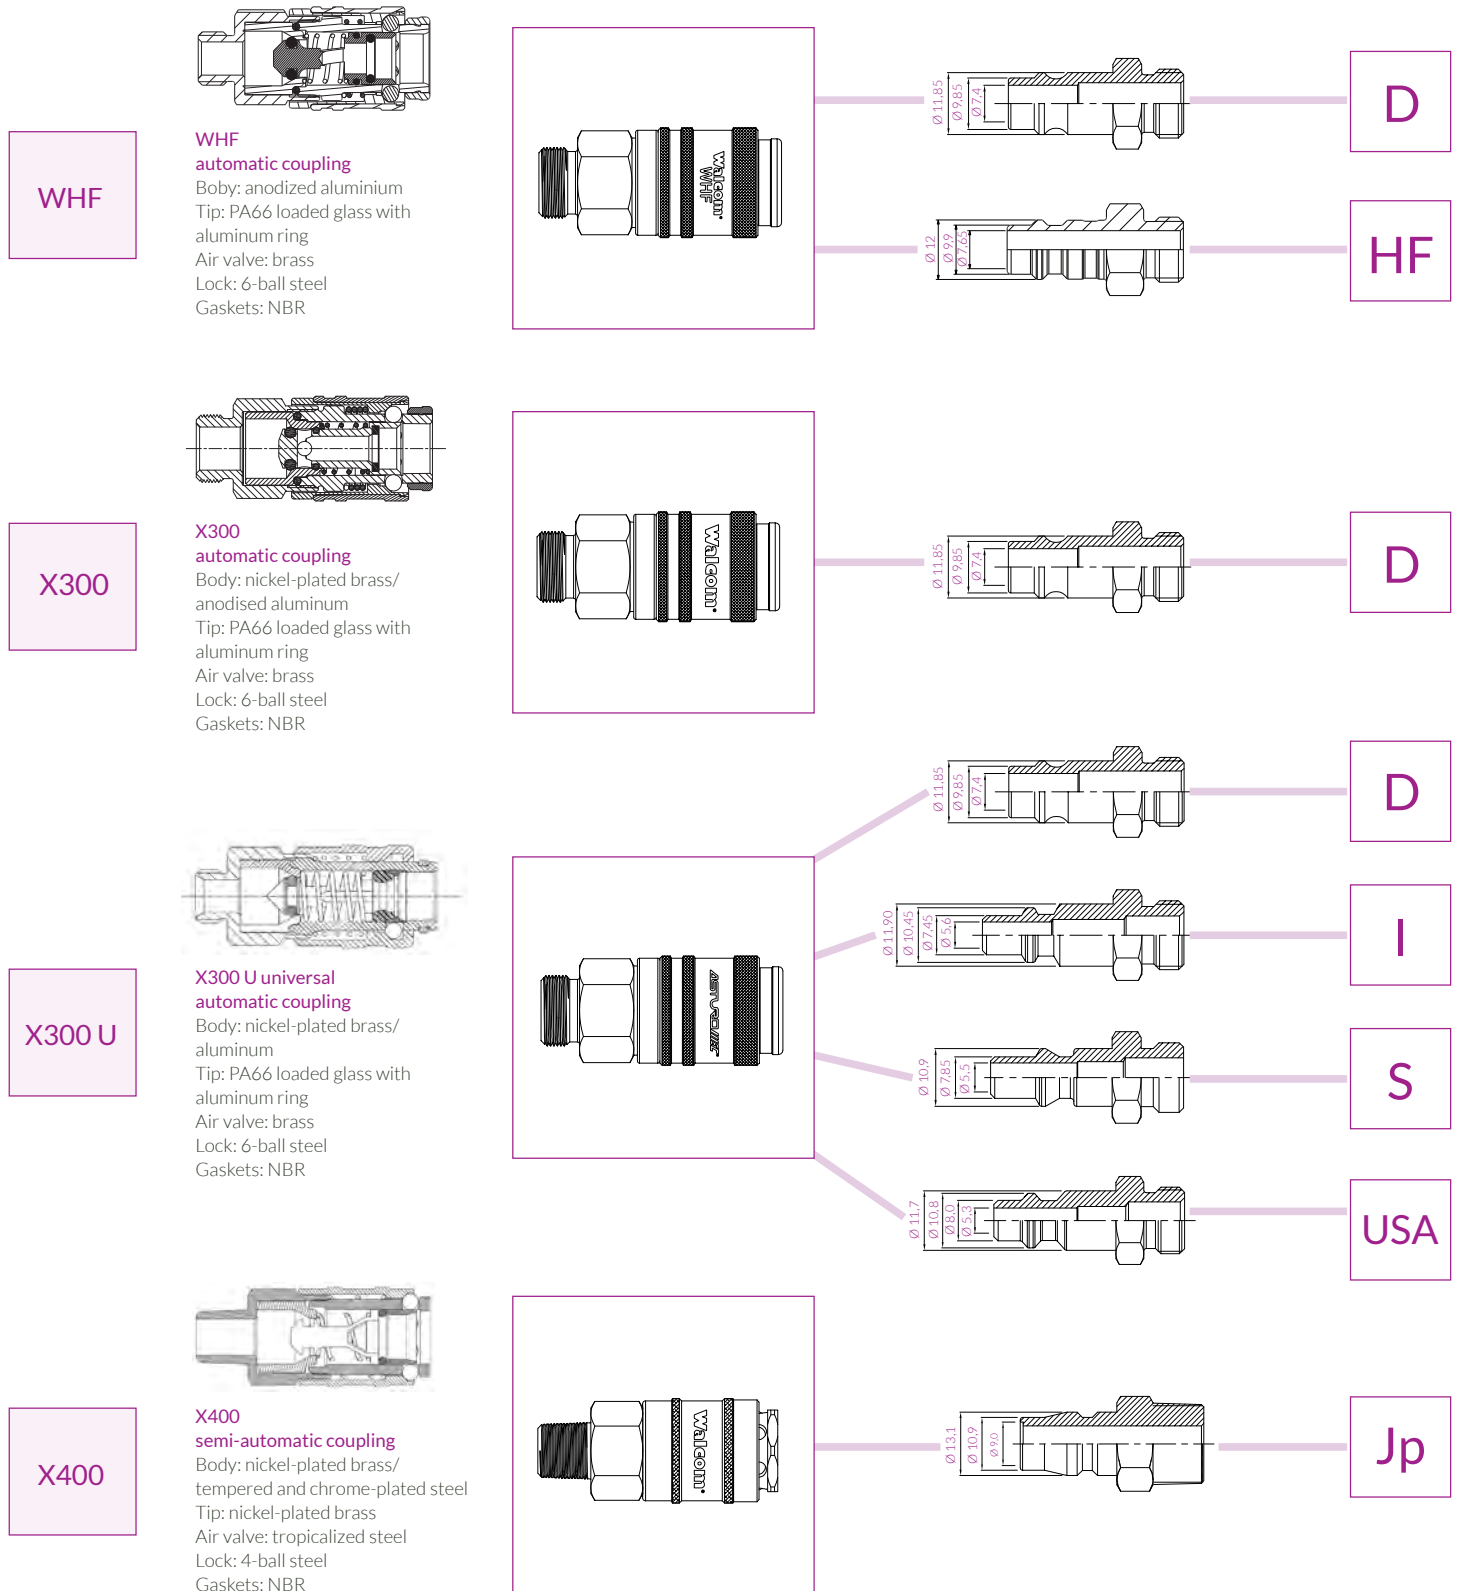

COUPLINGS AND PLUGS

ITEM ID. DESCRIPTION PACKAGING

10921	WHF - MALE	thread 1/4"	10 pcs
10931	WHF - FEMALE	thread 1/4"	10 pcs
10922	WHF - MALE	thread 3/8"	10 pcs
10932	WHF - FEMALE	thread 3/8"	10 pcs



10251	X300 - MALE	thread 1/4"	10 pcs
10252	X300 - MALE	thread 3/8"	10 pcs
10253	X300 - MALE	thread 1/2"	10 pcs
10261	X300 - FEMALE	thread 1/4"	10 pcs
10262	X300 - FEMALE	thread 3/8"	10 pcs
10263	X300 - FEMALE	thread 1/2"	10 pcs
10271	X300 - WITH REST	internal Ø 6 mm	10 pcs
10272	X300 - WITH REST	internal Ø 8 mm	10 pcs
10273	X300 - WITH REST	internal Ø 10 mm	10 pcs



10201U	X300 U - MALE	thread 1/4"	25 pcs
10202U	X300 U - MALE	thread 3/8"	25 pcs
10203U	X300 U - MALE	thread 1/2"	25 pcs
10211U	X300 U - FEMALE	thread 1/4"	25 pcs
10212U	X300 U - FEMALE	thread 3/8"	25 pcs
10213U	X300 U - FEMALE	thread 1/2"	25 pcs
10221U	X300 U - WITH REST	internal Ø 6 mm	25 pcs
10222U	X300 U - WITH REST	internal Ø 8 mm	25 pcs
10223U	X300 U - WITH REST	internal Ø 10 mm	25 pcs



10551	X400 - MALE	thread 1/4" U	10 pcs
10552	X400 - MALE	thread 3/8" U	10 pcs
10651	X400 - FEMALE	thread 1/4" U	10 pcs
10652	X400 - FEMALE	thread 3/8" U	10 pcs
10555	X400 - WITH REST	internal Ø 8 mm	10 pcs
10556	X400 - WITH REST	internal Ø 10 mm	10 pcs



PLUG for WHF / X300 / X300 U

11041	WHF - X300 - X300 U - D MALE PLUG	thread 1/4"	25 pcs
11042	WHF - X300 - X300 U - D MALE PLUG	thread 3/8"	25 pcs
11043	WHF - X300 - X300 U - D MALE PLUG	thread 1/2"	25 pcs
11141	WHF - X300 - X300 U - D FEMALE PLUG	thread 1/4"	25 pcs
11142	WHF - X300 - X300 U - D FEMALE PLUG	thread 3/8"	25 pcs



PLUG for X400 U

11470	X400 - JP MALE PLUG	thread 1/4" U	10 pcs
11471	X400 - JP MALE PLUG	thread 3/8" U	10 pcs
11480	X400 - JP FEMALE PLUG	thread 1/4" U	10 pcs
11481	X400 - JP FEMALE PLUG	thread 3/8" U	10 pcs



PLUG for WHF

11501	WHF - WHF MALE PLUG	thread 1/4"	10 pcs
11502	WHF - WHF MALE PLUG	thread 3/8"	10 pcs
11511	WHF - WHF FEMALE PLUG	thread 1/4"	10 pcs
11512	WHF - WHF FEMALE PLUG	thread 3/8"	10 pcs



PRESSURE REGULATORS FOR SPRAY GUNS

Professional pressure regulators for precise painting.

From the innovative membrane system, which absorbs compressed air line pressure fluctuation, very light carbon regulators with detachable digital pressure gauge (EJS system - easy joint system) with rotating or swivel connection, to traditional aluminum regulators with analog gauges.

A complete range for any type of requirement and need.



Walcom®
SPRAY GUN EVOLUTION

MADE IN ITALY

DGT PRO REGULATOR

DGT PRO carbon fiber regulator, swivel connection and digital pressure gauge with EJS system.

MEMBRANE REGULATOR

Membrane regulator, ideal for equalizing the inlet pressure in the case of any changes in the air line.

Maximum guarantee for quality painting. EJS system for quick attachment and release of the digital pressure gauge.

DIGITAL GAUGE

Digital pressure gauge with EJS system.

Settable in psi, bar, Kg/cm², kPa according to the needs.

PACKAGING

All our accessories are packed in safe box, plastic bag with hook system, configure to be easily stocked on shelves or grid stand.

High quality accessories line Made in Italy

PRESSURE REGULATORS

ITEM ID DESCRIPTION

MR-DGT MEMBRANE REGULATOR

90187/W Professional pressure regulator with internal membrane, capable of compensating for drops in line pressure up to 1 bar (14 psi), keeping the pressure constant spray gun inlet. Equipped with digital carbon fiber pressure gauge with EJS system.

90188/W Version without pressure gauge **

Body: in POM with membrane in EPDM and internal spring in stainless steel.

Knob for pressure regulation equipped with safety lock.

Gauge: high precision digital with carbon fiber case

Scale: 0 - 10 bar / 0 - 145 psi

Air inlet: 1/4" U swivel, compatible with various standard 1/4"

EJS system (easy joint system) with automatic tap, for practical release and connection of the pressure gauge.

Packaging: 1 pcs

Weight: 175 g / **135 g



PRESSURE REGULATORS

PRESSURE REGULATORS

ITEM ID DESCRIPTION

CARBON PRESSURE REGULATOR

90193/W DGT PRO - High flow and precision pressure regulator, with carbon fiber structure and 1/4 swivel connection, digital pressure gauge with carbon fiber case.
Gauge: high precision digital with carbon fiber case
EJS system (easy joint system) with automatic tap, for practical release and connection of the pressure gauge.



90194/W PRO - High flow and precision pressure regulator, with carbon fiber structure and 1/4 swivel connection.
Compatible with EJS (easy joint system).

Body: carbon fiber

Scale: 0 - 10 bar / 0 - 145 psi (DGT PRO)

Air inlet: 1/4 "U swivel, compatible with various standard 1/4"

Packaging: 1 pcs

Weight: 118 g - 77 g



CARBON PRESSURE REGULATOR / ADJUSTABLE ANGLE

90190/W DGT PRO - High flow and precision pressure regulator, with carbon fiber structure and 1/4 swivel connection and adjustable angle 30°, digital pressure gauge with carbon fiber case.
Gauge: high precision digital with carbon fiber case
EJS system (easy joint system) with automatic tap, for practical release and connection of the pressure gauge.



90192/W PRO - High flow and precision pressure regulator, with carbon fiber structure and 1/4 swivel connection and adjustable angle 30°.
Compatible with EJS (easy joint system).

Body: carbon fiber

Scale: 0 - 10 bar / 0 - 145 psi (DGT PRO)

Air inlet: 1/4 "U swivel adjustable 30° angle connection, compatible with various standard 1/4"

Packaging: 1 pcs

Weight: 127 g - 86 g



DIGITAL CARBON FIBER GAUGE - DGT

90181/W Digital gauge high precision, carbon fiber housing.

Scale: 0 - 10 bar / 0 - 145 psi

EJS system (easy joint system) with automatic tap, for practical release and connection of the pressure gauge.

Packaging: 1 pcs

Weight: 41 g



DIGITAL CARBON FIBER GAUGE - DGT T-RH

90270/W Temperature, humidity and dew point meter, with carbon fiber structure, offers a precise check of the quality of the air entering the spray gun.

Scale: 0 - 10 bar / 0 - 145 psi

EJS system (easy joint system) with automatic tap for practical release and connection to the Walcom PRO series regulators and to the GENESI CARBONIO EVO series.

Packaging: 1 pcs

Weight: 41 g



PRESSURE REGULATORS

PRESSURE REGULATORS

ITEM ID DESCRIPTION

AL REGULATOR

90197/W Direct flow air flow regulator in anodized aluminum and glass pressure gauge with metal case, to be applied to the air inlet of the spray gun.
Pressure gauge: diameter 40 mm - scale 0-10 bar / 0-145 psi

Air inlet: 1/4 "U swivel, compatible with various standard 1/4"
Packaging: 1 pcs
Weight: 142 g



REGULATOR

90105/W Air flow regulator with glass pressure gauge and metallic case to be applied to the spray gun air inlet.
Pressure gauge: scale 0 -10 bar / 0 - 145 psi
Air inlet: 1/4 "U swivel, compatible with various standard 1/4"



90106/W Air flow regulator to be applied to the spray gun air inlet.

Air inlet: 1/4 "U swivel, compatible with various standard 1/4"
Packaging: 1 pcs
Weight: 138 g - 68 g



GAUGE

61306 Spare gauge for air flow regulator, connection M 1/8".

Operating air pressure: 0 - 10 bar / 0 - 145 psi
Packaging: 1 pcs
Weight: 70 g



GAUGE PROTECTOR

90128 Gauge protector from 39 to 43 mm

90129 Gauge protector da 63 mm

Transparent shockproof and paint-proof pressure gauge guard, washable with solvent.
Packaging: 10 pcs
Weight: 10 g



PAINTING MASKS

Health care represents an essential aspect for Walcom®. Which is why we have developed a professional line of painting masks of the highest quality level, combined with practicality of use and comfort.

Evo 360 mask the innovative battery-powered painting mask from Walcom®.

It does not require connection to the compressed air line, making the operator completely free to move inside the spray booth.

The sophisticated and professional air filtration system, based on three different filtering levels (pre-filter-master filter for dust and various impurities-activated carbon filter for impurity residues) purifies the air making it 100% breathable.

The remarkable battery life and charging speed make use efficient by the operator who, thanks to the large anti-glare visor, can operate precisely and effectively.

Helmet - Safety the Walcom® mask line also includes the traditional complete mask, equipped with an activated carbon filter and connected to the compressed air line (Helmet) and the practical Safety line for quick applications, always in complete safety from a respiratory point of view.

Walcom®
SPRAY GUN EVOLUTION



MADE IN ITALY

FILTERS

The effectiveness of the masks is based on changing the filters and maintaining the masks.

Failure to replace filters or cartridges is equivalent to not wearing a mask, with the risk of seriously compromising the patient's respiratory system. painter. We therefore recommend that you respect the instructions on how often to replace the filters.

ITEM ID DESCRIPTION

EVO 360 MASK

50423/W Approved protection mask CE+ATEX approved

Purified air thanks to 3 internal filters

3 speed levels

Long-lasting battery (18 hours of battery life)

Speed 1 = 18 h duration, speed 2 = 15 h duration, speed 3 = 12 h duration

Fast charging 80% in 30 minutes

Large anti-glare visor with 90° opening lock system

Equipment: 10 visor protection films + 25 pre-filters + master filter + activated carbon filter

Leather belt

Packaging: 1 pcs

Weight: 2.3 Kg



6 MONTH FILTER PACKAGE

50434/W 6 month filter package


150 prefilters - 6 master filters - 3 activated carbon filters

1 - PREFILTER to be replaced daily

2 - MASTER FILTER to be replaced every month

3 - ACTIVATED CARBON FILTER to be replaced every 2 months

Packaging: 1 pcs - Weight: 2.2 Kg



PAINTING MASKS

MASKS

ITEM ID DESCRIPTION

INDIVIDUAL SPARE PARTS

50428/W 1 - PREFILTER to be replaced daily

50426/W 2 - MASTER FILTER to be replaced every month *

50427/W 3 - ACTIVATED CARBON FILTER to be replaced every 2 months **

50430/W 4 - FILMS removable for visor protection

50437/W 5 - VISOR

50431/W 6 - BATTERIES

50429/W 7 - SHOULDER HARNESS

1= Packaging 50 pcs - Weight 85 g

2 = Packaging 1 pcs - Weight 92 g

3 = Packaging 1 pcs - Weight 477 g

4 = Packaging 10 pcs - Weight 69 g

5 = Packaging 1 pcs - Weight 56 g

6 = Packaging 1 pcs - Weight 372 g

7 = Packaging 1 pcs - Weight 246 g



HELMET

50400/W Approved protective mask CE0194 approved - EN1459N:2005 class A standard compliant

Visored helmet with internal ventilation

Pressure drop safety buzzer

Polyurethane hose for spray gun connections

Filtering kit with carbon filters

Belt

2 spare adhesive visor cover

Packaging: 1 pcs - Weight: 1.2 Kg



SAFETY PLUS

50410/W Protective mask with 2 active carbon filters

50411/W Spare filter for ITEM ID 50410/W - weight 100 g

Meet EEC standards, 89/686/EEC directive

Packaging: 1 pcs

Weight: 320 g



SAFETY

50416/W Protective mask with 1 active carbon filter

50417/W Spare filter for ITEM ID 50416/W - weight 100 g

Meet EEC standards, 89/686/EEC directive

Packaging: 1 pcs

Weight: 280 g




PAINING ACCESSORIES

Professional accessories designed to facilitate work in the body shop and guarantee work in complete safety for the operator and a result of absolute quality. From the new painting overalls, designed and manufactured to guarantee maximum comfort and maximum practicality, to the range of filters, sieves and viscometers for suitable paint preparation.

The spray gun supports then offer the operator the possibility of arranging the spray guns in an orderly manner, both in the cabin and in the paint box, being able to choose between different types of magnetic and non-magnetic supports.

360 MAG HOLDER, the latest addition, also offers the possibility of attaching not only the spray gun but also the painting hose, thus avoiding leaving it on the booth grate. Finally 360 TRUE LIGHT, the innovative painting light that also becomes a solar check for color control.

Unique in its kind thanks to the intensity characteristics that can be modulated based on the colours, the opaque and interchangeable smoke protection glass, the Led crown of 36 lights which makes the light beam homogeneous and free of shadows and reflections, the universality thanks to the 5 adapters for the main spray guns on the market, battery life and charging speed. Made of anodized aluminum and carbon fibre, 360 TRUE LIGHT represents a truly professional tool to assist the operator during the painting and color control phase.

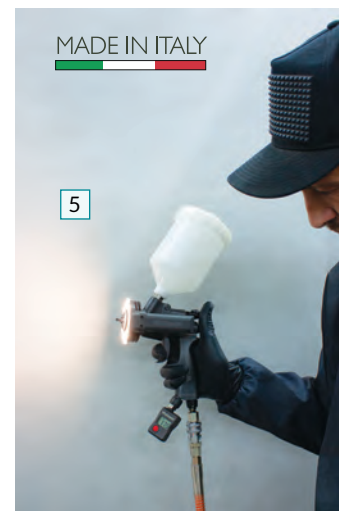

1 - SUIT

Made of nylon and carbon filaments for better breathability. Treatment antistatic and possibility of having separate jacket and trousers, for more practical management of clothing in the spray booth.

2 - VISCOSIMETER

Indispensable in hostaform to check density, commonly called the "Ford 4 cup" by workers.

3 - SUPPORTER

Valid supports for 1 or 2 spray guns with upper cup, booth wall mountable with a supplied magnet or screws (Supporter), and bench top (Skeleton).

4 - 360 MAG HOLDER

Practical magnetic holder for spray gun and for painting hose. Unique in its kind thanks to the attachment system on the trigger and not on the cup and thanks to the possibility of attaching the painting hose effectively and safely.

5 - 360 TRUE LIGHT

Practical and innovative painting light that also becomes a solar check for color match. Universal, thanks to the 5 adapters supplied, adjustable, light and balanced light intensity.

PAPER SIEVE

Practical, efficient, disposable sieve for correct paint filtering.

PACKAGING

All our accessories are packed in safe box, plastic bag with hook system, configure to be easily stocked on shelves or grid stand.

High quality accessories line Made in Italy

ITEM ID DESCRIPTION

PAINING CLOTHING

ARC183/** 1- COMPLETE JACKET + TROUSERS
High quality for the spray booth. Antistatic, breathable and elasticized. In black nylon reinforced with carbon filaments.

ARC184/** 2- JACKET only

ARC185/** 3- only PANTS

ARC041/** 4- SUIT
made for use in the spray booth in breathable white nylon and antistatic. Single pocket.

Sizes: **add size (S - M - L - XL - XXL) to the ITEM ID - (pants only M - L - XL)

White jumpsuit (**52 - 54 - 56)

Packaging: 2 pcs COMPLETE - 1 pcs only JACKET / only TROUSERS

Weight: 155 g / 90 g / 65 g



PAINING ACCESSORIES

ACCESSORIES

ITEM ID DESCRIPTION

360 TRUE LIGHT EVO

60172 Painting light with protective and interchangeable opaque lens (patented system). True light for color matte check.

Adjustable light intensity
5 universal adapters for hat ring
Carbon fiber shell, anodized aluminum ring
Ring with 36 white light LEDs
Rechargeable battery with duration of 2.5 hours at maximum intensity, 14 hours maximum total duration
CRI 98 - true light
Dimensions: 10.5 x 8.5 x 8.5 cm
Packaging: 1 pcs
Weight: 157g



360 TRUE LIGHT EVO METER

60176 Painting light with protective and interchangeable opaque lens (patented system) and laser pointer for detecting the correct painting distance. Possibility to set the distance based on the type of spray gun and/or the type of paint product. True light for stain and color control.

Adjustable light intensity
5 universal adapters for hat ring
Carbon fiber shell, anodized aluminum ring
Ring with 36 white light LEDs
Laser pointer system with display and colored LEDs for painting distance detection
Rechargeable battery with duration of 2.5 hours at maximum intensity, 14 hours maximum total duration
CRI 98 - true light
Magnet supplied for fixing the lamp to the spray booth wall
Dimensions : 12 x 9 x 8,5 cm
Packaging: 1 pcs
Weight: 185 g



1 - KIT PER 360 TRUE LIGHT

90240 Kit of 10 protective and matte LENSES designed to safeguard the crown LEDs and to eliminate annoying light reflections during the painting phase.



2 - RUBBER ADAPTERS for different types of spray gun

3-piece kit - Consult the table to find the adapter for your spray gun. Check here

Check here



3



2



3 - PAINT REMOVER

90261 Propylene Glycol spray solution with a specific formula, suitable for removing painting fumes from the protective lenses of the True Light, and for creating a protective base to prevent subsequent deposits. It does not contain solvents or VOCs. 200 ml spray can.

PAINING ACCESSORIES

ACCESSORIES

ITEM ID DESCRIPTION

360 MAG HOLDER

60171 Universal magnetic holder for any type of spray gun, with hook for painting hose support.

Characteristics:

Robust and elastic (PCTG)

Solvent resistant

Dimensions cm: L 17 x D 7.5 x H 12.5 cm

Packaging: 1 pcs

Weight: 109g



SUPPORTER

60130 Magnetic holder for spray guns with gravity cups. Can also be affixed to non-ferrous surfaces using supplied screws.

Features:

Painted steel

Dimensions cm: L 20 x P 14.5 x H 23.2 cm

Packaging: 1 pcs

Weight: 1.68 Kg



SKELETON

60149/W Holder for spray guns with gravity cups. Simple, stable and ergonomic, suited for any spray gun.

Features:

Galvanised steel

Dimensions cm: L 13 x P 20 x H 29 cm

Packaging: 1 pcs

Weight: 177 g



CLEANING KIT

90109/W Cleaning set indispensable for spray gun maintenance.

Composition:

1 pin;

1 big cleaning brush;

1 small cleaning brush;

Packaging: 1 Kit

Weight: 30 g



ARTICULATED FITTING

11048 F 1/4"nickel-plated brass fitting with 30° joint, ideal for painting. Jp standard Japanese version *

11049 F 1/4"nickel-plated brass fitting with 30° joint, ideal for painting. D standard German version **

Packaging: 10 pcs

Weight: *680 g - ** 640 g



PAINTING ACCESSORIES

ACCESSORIES

ITEM ID DESCRIPTION

FILTER

90111/W Steam trap filter with filler component and steam release valve to be fitted at the inlet of the spray gun.

Packaging: 1 pcs
Weight: 100 g



FILTER

60097/W 100-mesh (750 µm) complete filter for pressure fed spray guns, F/M 3/8" version*

60098/W 100-mesh (750 µm) complete filter for pressure fed spray guns, F/M 1/4" version *

412012/W 100-mesh (750 µm) complete filter for ITEM ID 60097/W **

* Packaging: 1 pcs = weight: 50 g - ** Packaging: 1 pcs = weight: 25 g



FILTER

90112/W 2000-mesh (160 µm) stainless steel paint filter to be attached to the suction hose of spray guns with suction cups.

Packaging: 10 pcs
Weight: 50 g



FILTER

90113/W Nylon paint filter to be attached to the suction hose of spray guns with suction cups.

** Specificare n° maglie: 5000-7000-10000 (90 µm-75 µm-60 µm)
Confezione: 10 pz.
Peso: 65 g



SLIM / SLIM XLIGHT FILTER

90114/W 2000-mesh (160 µm) nylon paint filter to be attached to the spray gun with gravity cups for touch-ups.

90137/W 500-mesh (300 µm) nylon paint filter to be attached to the spray gun with gravity cups for primers.

Packaging: 10 pcs
Weight: 40 g



PAINTING ACCESSORIES

ACCESSORIES

ITEM ID DESCRIPTION

GENESI CARBONIO 360 EVO-LIGHT / GENESI ALLUMINIO / GENESI TOP LINE / SLIM KOMBAT FILTER

90145/W 800-mesh (230 µm) nylon paint filter to be attached to the spray guns with gravity cups.

Packaging: 10 pcs
Weight: 40 g



SIEVE

90115/W** Nylon sieve for paint

Specify: 2000 - 5000 - 7000 - 10000 - 15000 - 17000 mesh
(160 µm-90 µm-75 µm- 60 µm-45 µm-40 µm)
Packaging: 10 pcs
Weight: 300 g



PAPER SIEVE

90146.10 Disposable paper paint sieve - 1000 mesh version (190 µm)

90146.25 Disposable paper paint sieve - 2500 mesh version (125 µm)

Packaging: 250 pcs
Weight: 1.473 Kg



VISCOSIMETER

90116/W "FORD 4" viscosimeter cup to test paint density.

Packaging: 3 pcs
Weight: 270 g



PAINTING HOSES

Professional range of hoses specific to paint booths, also available in the practical 10/12 metre coupled versions.

In addition to the high performance Polyurethane and flexible Ragno, already popular and appreciated on the market, a new Walcom® SUPERFLEX hose is introduced with high performance in terms of sturdiness, durability, seal, temperature resistance and flexibility: ideal for safe painting in the spray booth.

HOSES

ITEM ID DESCRIPTION

SUPERFLEX

60307 High performance and resistance hose, PU (Polyurethane) composite and thermoplastic rubber, reinforced with polyester. Antistatic. **100 m coil**
Internal diameter 10 mm - external diameter 15 mm

Substrate and cover: PU composite and thermoplastic rubber
Reinforcing: polyester fiber
Operating air pressure: 15 - 20 bar / 217 - 290 psi
Exploding pressure: 60 bar / 870 psi
Temperature: - 15°C + 70°C
Packaging: 1 pcs



SUPERFLEX WITH FITTINGS

60309 High performance and resistance hose, PU (Polyurethane) composite and thermoplastic rubber, reinforced with polyester. Antistatic. **12 m coil**
Internal diameter 10 mm - external diameter 15 mm

Substrate and cover: PU composite and thermoplastic rubber
Reinforcing: polyester fiber
Operating air pressure: 15 - 20 bar / 217 - 290 psi
Exploding pressure: 60 bar / 870 psi
Temperature: - 15°C + 70°C
Packaging: 1 pcs



HF - SUPERFLEX WITH FITTINGS

60309/HF High performance and resistance hose, PU (Polyurethane) composite and thermoplastic rubber, reinforced with polyester. Antistatic. **12 m coil**
Internal diameter 10 mm - external diameter 15 mm

Substrate and cover: PU composite and thermoplastic rubber
Reinforcing: polyester fiber
Operating air pressure: 15 - 20 bar / 217 - 290 psi
Exploding pressure: 60 bar / 870 psi
Temperature: - 15°C + 70°C
Standard HF connection
Packaging: 1 pcs



STRAIGHT POLYURETHANE

60200 **100 m coil**
Internal diameter 6 mm - external diameter 10 mm

60201 **100 m coil**
Internal diameter 8 mm - external diameter 12 mm

60202 **100 m coil**
Internal diameter 10 mm - external diameter 14.5 mm

Substrate and cover: 100% polyurethane
Reinforcement: 550/1100 Trevira Heochst polyester yarn
Operating air pressure: 20 bar / 290 psi
Exploding pressure: 60 bar / 870 psi
Temperature: - 25°C + 60°C
Packaging: 1 pcs



PAINTING HOSES

HOSES

ITEM ID DESCRIPTION

STRAIGHT POLYURETHANE WITH FITTINGS

60210 10 m coil with 2 swiveling female 1/4" fittings
Internal diameter 6 mm - external diameter 10 mm

60211 10 m coil with 2 swiveling female 1/4" fittings
Internal diameter 8 mm - external diameter 12 mm

60212 10 m coil with 2 swiveling female 1/4" fittings
Internal diameter 10 mm - external diameter 14.5 mm

Substrate and cover: 100% polyurethane

Reinforcement: 550/1100 Trevira Hoechst polyester yarn

Operating air pressure: 20 bar / 290 psi

Exploding pressure: 60 bar / 870 psi

Temperature: - 25°C + 60°C

Packaging: 1 pcs



STRAIGHT POLYURETHANE WITH FITTINGS

60220 25 m coil with 2 swiveling female 1/4" fittings.
Internal diameter 6 mm - external diameter 10 mm

60221 25 m coil with 2 swiveling female 1/4" fittings.
Internal diameter 8 mm - external diameter 12 mm

60222 25 m coil with 2 swiveling female 1/4" fittings.
Internal diameter 10 mm - external diameter 14.5 mm

Substrate and cover: 100% polyurethane

Reinforcement: 550/1100 Trevira Hoechst polyester yarn

Operating air pressure: 20 bar / 290 psi

Exploding pressure: 60 bar / 870 psi

Temperature: - 25°C + 60°C

Packaging: 1 pcs



RAGNO HOSE

60250 50 m coil
Internal diameter 10 mm - external diameter 15 mm

60254 50 m coil
Internal diameter 8 mm - external diameter 12 mm

Substrate and cover: polyurethane anti-abrasive and thermoplastic rubber

Reinforcement: polyester yarn

Operating air pressure: 20 bar / 290 psi

Exploding pressure: 60 bar / 870 psi

Temperature: - 20°C + 60°C

Packaging: 1 pcs



RAGNO HOSE WITH FITTINGS

60252 10 m coil with fittings
Internal diameter 10 mm - external diameter 15 mm

Substrate and cover: polyurethane anti-abrasive and thermoplastic rubber

Reinforcement: polyester yarn

Operating air pressure: 20 bar / 290 psi

Exploding pressure: 60 bar / 870 psi

Temperature: - 20°C + 60°C

Packaging: 1 pcs



FILTER SERIES

Walcom® series filter groups represent the maximum expression of quality in terms of compressed air treatment in body shop.


Line, drop line, spray booth: perfectly clean and filtered air is a must, and for this reason Walcom® has created a complete range of single and combined filter groups, able to fully eliminate all water, oil, dust and humidity residue from mains air, generating breathable air thanks to the active carbon filter.

The new /11 series combines a restyled look with higher efficiency which, thanks to the new air passage designs, guarantees 1200 l/min / 42 cfm air flow, allowing for efficient body shop with even 2 spray guns, not simultaneously.

The EVO series is characterized by the possibility of automatically regenerating the silica gel, allowing the operator to always work in the absence of humidity, without having to carry out any manual action.

The resistance inserted inside the silica gel tube is activated automatically as soon as the control unit detects the minimum pressure difference between inlet and outlet. This pressure difference is generated by the principle of saturation of the silica gel which must be regenerated.

EXAMPLE OF THE AIR PIPING IN THE BODY SHOP

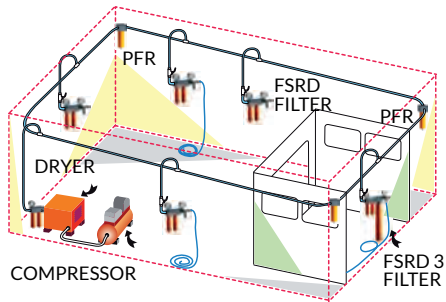

Piping inclination 0.5 - 1% max

Walcom®
SPRAY GUN EVOLUTION



MADE IN ITALY

1 - PAIR PASSAGES

3/4" air passages with 1200 l/min (42 cfm) capacity.

Possibility of working with 2 spray guns not at the same time.

2 - BAR

CNC processed extruded and anodized aluminum bar and hoses.

3 - PRESSURE REGULATIONS

High precision pressure regulator with pressure gauge.

4 - SATURATION INDICATORS

Silica gel saturation indicators (FSRD 4 - FSRD 3 - ESR versions).

5 - DISCHARGE

Automatic for water and manual for oil.

ITEM ID DESCRIPTION

FSRD 4 EVO

60177 A modular filter system ideal for use in the spray booth.

Composition:

- 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
- 2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
- 3) Silica dryer group to reduce residual humidity in the compressed air. Nr. 3 saturation indicator lights.
- 4) Active carbon filter to eliminate all impurities and obtain breathable air.

Automatic regeneration of silica gel using integrated resistance and control unit.

Max residue < 0.0003 mg/m³.

Central body: anodized aluminum

Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"

Filtering power: water filter 25 µm - oil 0.01 µm - carbons <0,0003 mg/m³.

Operating air pressure: 12 bar / 174 psi

Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi

Weight: 11.5 Kg

Non-ATEX product, to be mounted outside the paint booth.

Recommended use



FILTER SERIES

FILTER

ITEM ID DESCRIPTION

FSRD 4

60138/11 A modular filter system ideal for use in the spray booth.

Composition:

- 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
- 2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
- 3) Silica dryer group to reduce residual humidity in the compressed air. Nr. 3 saturation indicator lights.
- 4) Active carbon filter to eliminate all impurities and obtain breathable air.

Max residue < 0.0003 mg/m³.

Central body: anodized aluminum

Pressure adjuster: membrane system and automatic decompression

Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"

Filtering power: water filter 25 µm - oil 0.01 µm - carbons <0,0003 mg/m³.

Operating air pressure: 12 bar / 174 psi

Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi

Weight: 11 Kg

Recommended use



FSRD 3

60123/11 Sistema di filtraggio aria modulare, ideale per l'utilizzo nelle cabine di verniciatura.

Composition:

- 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
- 2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
- 3) Silica dryer group to reduce residual humidity in the compressed air. Nr. 3 saturation indicator lights.
- 4) Filter to eliminate dust generated by silica, 5 µm filtering capacity.

Central body: anodized aluminum

Pressure adjuster: membrane system and automatic decompression

Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"

Filtering power: water filter 25 µm - oil 0.01 µm - powders 5 µm

Operating air pressure: 12 bar / 174 psi

Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi

Weight: 11 Kg

Recommended use



FSRD 2

60145/11 A modular filter system ideal for use in the spray booth.

Composition:

- 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
- 2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
- 3) Active carbon filter to eliminate all impurities and obtain breathable air. Max residue < 0.0003 mg/m³.

Max residue < 0.0003 mg/m³.

Central body: anodized aluminum

Pressure adjuster: membrane system and automatic decompression

Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"

Filtering power: water filter 25 µm - oil 0.01 µm - carbons <0,0003 mg/m³.

Operating air pressure: 12 bar / 174 psi

Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi

Weight: 7 Kg

Recommended use



FSRD

60121/11 Air treatment system excellent for use in body shop and industry.

Composition:

- 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
- 2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.

Central body: anodized aluminum

Pressure adjuster: membrane system and automatic decompression

Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"

Filtering power: water filter 25 µm - oil 0.01 µm

Operating air pressure: 12 bar / 174 psi

Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi

Weight: 4.7 Kg

Recommended use



FILTER SERIES

FILTER

ITEM ID DESCRIPTION

FCA

60139/11 Active carbon filter to eliminate all impurities and obtain breathable air, max oil residue < 0.0003 mg/m³.

Central body: anodized aluminum
Air inlet: F 3/4"; air outlet: F 3/4"
Operating air pressure: 12 bar / 174 psi
Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi
Weight: 2 Kg

Recommended use



PFR

60127/11 Filter unit for the elimination of condensation.

Composition:

1) Synthetic fibre pre-filtering element to eliminate condensation. Automatic drain.
Central body: anodized aluminum
Pressure adjuster: membrane system and automatic decompression
Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
Filtering power: water filter 25 µm
Operating air pressure: 12 bar / 174 psi
Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi
Weight: 3.45 Kg

Recommended use



ESR EVO

60178 Silica drying unit, to eliminate residual humidity in compressed air, to be used in combination with an air pre-filtering group in a spray booth.

Composition:

1) Filter to eliminate dust generated by silica 5 µm.
Automatic regeneration of silica gel using integrated resistance and control unit.
Central body: anodized aluminum
Provided with an indicator to show saturation of the silica which can be replaced or regenerated (4 hours at 120° C).
Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
Filtering power: air 5 µm
Operating air pressure: 12 bar / 174 psi
Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi
Weight: 7,45 Kg
Non-ATEX product, to be mounted outside the paint booth.

Recommended use



ESR

60129/11 Silica drying unit, to eliminate residual humidity in compressed air, to be used in combination with an air pre-filtering group in a spray booth.

Composition:

1) Filter to eliminate dust generated by silica 5 µm.
Central body: anodized aluminum
Pressure adjuster: membrane system and automatic decompression
Provided with an indicator to show saturation of the silica which can be replaced or regenerated (4 hours at 120° C).
Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
Filtering power: air 5 µm
Operating air pressure: 12 bar / 174 psi
Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi
Weight: 6,95 Kg

Recommended use



FILTER SERIES

FILTER

ITEM ID DESCRIPTION

MBR WALL

60175 High precision diaphragm regulator, with double air outlet for connection with 2 spray guns.

Composition:

100 mm bar/psi double scale pressure gauge

Air consumption: 1800 l/min

Weight: 2,320 Kg

Packaging: 1 pcs

Recommended use



DOUBLE MEMBRANE REGULATOR

3064374 Double membrane regulator, recommended for the simultaneous use of 2 hoses with FSRD series.

This regulator compensates for the imbalances in the air flow volumes, generated by the flow absorption of the 2 hoses, allowing the use of the entire air flow rate of the equipment and making the simultaneous use of two hoses 100% efficient.

Weight: 1,950 Kg

Packaging: 1 pcs

Recommended use



THK

60134 The kit comes in a case for scheduled FSRD4 annual equipment maintenance

60168 The kit comes in a case for scheduled FSRD3 annual equipment maintenance

Composition:

nr. 1 synthetic fibre water filter: to be replaced once a year;

nr. 1 coalescent oil filter: to be replaced once a year;

nr. 2 active carbon filters: to be replaced every 6 months (only ITEM ID 60134);

nr. 1 - 1.3 kg silica gel packaging.

Weight: 2.28 Kg FSRD4 - Weight: 2.18 Kg FSRD3

Recommended use



SPARE PARTS FOR AIR FILTRATION SYSTEM

3064087 **1 - WATER FILTER** synthetic fiber to eliminate condensation.
Filtration capacity 25 micron

3063162 **2 - OIL FILTER** cartridge to eliminate oil impurities.
Filtration capacity 0.01 micron

3063236 **3 - SILICA GEL** silica gel beans to remove any residual humidity
(it can be regenerated in 4 h at 120°C , it can last maximum 1 year)

3064003A **4 - ACTIVE CHARCOAL** this filter remove any residual impurities, gas or vapor.
Max residual <0.00003mg/m³

All packs of 1 pcs

Weight: 1= 59 g 2= 79 g

3= 1,3 Kg 4= 8 g

Recommended use



THERMODRY TECHNOLOGY - TD³ PRO / TD¹ PRO

The new TD³ PRO and TD¹ PRO multifunctional heat conditioner range is a unique and innovative compressed air conditioning system inside a spray booth that lets you work with heat regulated air and, for TD³ PRO, without any solid and gaseous impurities.

The Thermodry Technology line, equipped with the new and more powerful THT hose and rich range of accessories, now represents the top in terms of efficiency and reliability in the paint phase, based on 3 main functions:

1 - Air heating and thermoregulation: the TD³ PRO / TD¹ PRO heating element, combined with the THT heated hose and internal J thermocouple, heat and regulate air to allow the operator to paint at constant temperature, regardless of the climate/room conditions. Let's not forget that air used in painting can even drop (due to air expansion) under 5°C.

TD PRO can reach temperatures between 20 and 50°C during the paint phase, essential for water-based and UHS transparent paint application, and over 70°C for drying.

Temperature which, once quickly reached, are kept constant during the entire work phase.

2 - Air filtering (TD³ PRO only): the full line of equipment filtering groups, water-oil-silica-active carbons, can achieve fully clean and breathable compressed air.

3 - Automatic dehumidifying mass regeneration (TD³ PRO only): once saturated with humidity, Silica gel requires regeneration. The TD³ PRO SRS system, due to the hot air flow inversion generated by the heating element, regenerates the entire humidifying mass in just 4 hours.

The new TD³ and and TD¹ multifunctional heat conditioner "PRO" line responds to user's suggestions, significantly contributing to the development of this new TD series.

In fact, experience is the foundation of each product and its success, and what better advice can contribute to perfecting a tool than that from people who use it every day?

Walmec, always attentive to these market inputs, has translated all this into a new efficient TD "PRO" series, with the following improvements:

- the new Tech Pro software, able to efficiently control tool operations, offers the operator the possibility of working in full safety and efficiency;
- the air flow rate (over 1,200 l/min / 42 cfm) allows you to work in full efficiency even with two spray guns not at the same time;
- the new THT hose's heating power, 1.000 W, grants higher reactivity in reaching and maintaining set temperatures, with the consequent practically total reduction of operator wait time;
- the new automatic condensation drain system, for higher cleaning and tool maintenance security.

New and important features that further enhance this exceptional tool that has stood out as the most efficient and complete on the market.



MADE IN ITALY

BENEFITS

Integral and efficient system use provides the following benefits:

- 1 saving up to 20% of paint material;
- 2 up to 40% drying time savings over traditional systems;
- 3 the possibility of lowering spray booth temperature by at least 5°C over that recommended by paint manufacturers;
- 4 better paint layout;
- 5 higher application speed;
- 6 elimination of brilliancy loss;
- 7 reduction of spot risks;
- 8 "orange peel" effect reduction;
- 9 full elimination of solid and gaseous impurities;
- 10 lowering of the dew point;
- 11 automatic and timed silica regeneration (TD³ PRO);
- 12 constant compressed air and hose temperature to fully guarantee system efficiency.

1 - EFFICIENT SOFTWARE

The Tech Pro version efficiently manages TD operations, controlling any system faults.

2 - DOUBLED AIR FLOW


The air flow rate of 1200 l/min / 42 cfm allows you to work with 2 spray guns in full efficiency, not at the same time.

3 - DRAIN SYSTEM

Automatic for water with safety rod for any clogs, manual for oil.

4 - THT PRO

New high performance and efficient hose with 1000 W power.

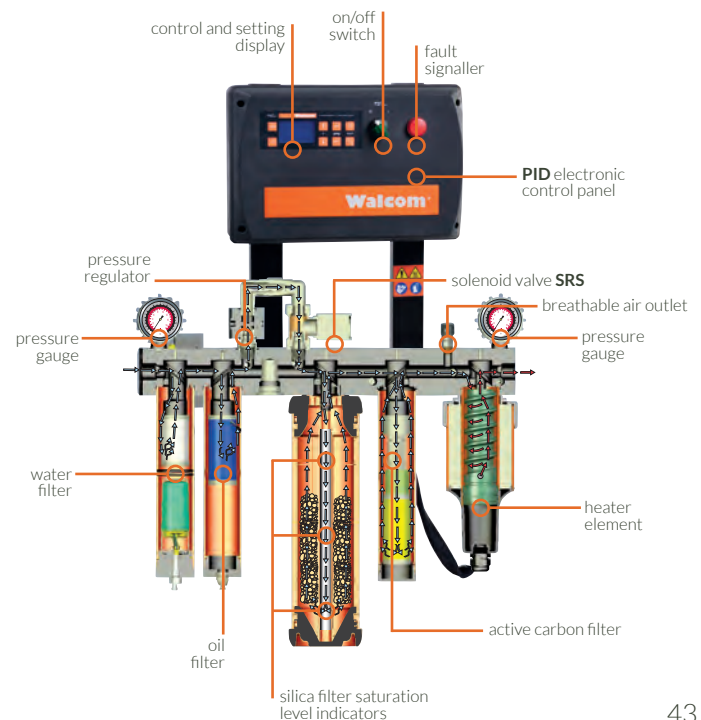

THERMODRY TECHNOLOGY

ITEM ID DESCRIPTION

TD³ PRO

60151/T Spray booth integrated air conditioning and thermoregulation system.

Composition:

1) Synthetic fibre pre-filtering element that eliminates condensation.
Automatic drain with safety rod for manual drain. Replace every 12 months.
2) De-greaser filter to eliminate residual pollutants. Manual drain. Replace every 12 months.
3) Drying group with silica gel that reduces residual humidity in compressed air.
Possibility of silica gel regeneration with TD³ PRO hot air flow SRS valve. Silica gel lasts max 1 year.
4) Active carbon filter to eliminate all impurities and obtain breathable air. Max oil residue < 0.0003 mg/m³.
Replace every 6 months.
5) Heating element with 1.000 W power controlled by an electronic unit with PID retroactive system and SCR heating power regulation.
Central body: anodised aluminum
Remote control with 3 preset and editable temperatures
Pressure regulator: membrane regulation and automatic decompression
Air inlet: F 3/4"; air outlet: F 3/4"
Filtering power: water filter 25 µm - oil 0.01 µm - carbons <0,0003 mg/m³.
Operating air pressure: 2 - 8 bar / 29 - 116 psi
Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi
Weight: 21 Kg

Recommended use



TD¹ PRO

60152/T Spray booth integrated thermoregulation system.

Composition:

1) Heating element with 1.000 W power controlled by an electronic unit with PID retroactive system and SCR heating power regulation.
Central body: anodised aluminum
Remote control with 3 preset and editable temperatures
Air inlet: F 3/4"; air outlet: 3/4"
Operating air pressure: 2 - 8 bar / 29 - 116 psi
Air consumption: 1200 l/min to 6 bar / 42 cfm at 87 psi
Weight: 6.7 Kg

Recommended use



60161 **THT - 12 METERS** vulcanised, antistatic rubber heated air hose.

60163 **THT - 17 METERS** vulcanised, antistatic rubber heated air hose.

60162 **THT - 22 METERS** vulcanised, antistatic rubber heated air hose.

Recommended use



Power: 1.000 W

Thermoregulation: internal J thermocouple

Dimensions: 10x15 mm - Length: 12/17/22 m

Weight: 2.4/4/5 Kg

THERMODRY TECHNOLOGY

THERMODRY TECHNOLOGY

ITEM ID DESCRIPTION

THC

3063303 Trolley

Painted steel rack structure, divided into two parts for easy assembly.
Permits easy TD³ PRO and TD¹ PRO transport and use.
Weight: 5.2 Kg

Recommended use



THK

60134 The kit comes in a case for scheduled TD³ PRO annual equipment maintenance.

Composition:

nr. 1 synthetic fibre water filter: to be replaced once a year;
nr. 1 coalescent oil filter: to be replaced once a year;
nr. 2 active carbon filters: to be replaced every 6 months;
nr. 1 1.3 kg silica gel packaging.
Weight: 2.28 Kg

Recommended use



DOUBLE MEMBRANE REGULATOR

3064374 Double membrane regulator, recommended for the simultaneous use of 2 THT hoses with TD³ PRO and TD¹ PRO equipment.
This regulator compensates for the imbalances in the air flow volumes, generated by the flow absorption of the 2 hoses, allowing the use of the entire air flow rate of the equipment and making the simultaneous use of two hoses 100% efficient THT.

Weight: 1,950 Kg
Packaging: 1 pcs

Recommended use



FAN JET THERMO

60170 Air pressure gun to dry the base at 70° C. Insulating handle and with air regulator control.

Blowing distance:

- 30-40 cm in the first seconds;
- 10-20 cm in the next stage.

Body: ergonomic in transparent insulating plastic

Nozzle: nylon and sunburst rubber

Air consumption: 450 l / min at 3 bar / 16 cfm at 43 psi

Weight: 280 g

Recommended use



HYGROMETRIC METER

90070 Portable system for quick air checking in the body shop.
Equipped with a quick coupling for connection to the compressed air line, it detects the air temperature, the humidity percentage and the dew point.

Aluminum structure
Packaging: 1 pcs
Weight: 464 g

Recommended use




FAN JET LINE

Specific line of products for drying bases. Lightweight, high-performance and ecological, they represent an innovative and high-performance system that can be summarized as follows:

- more effective; 40% reduction in drying time compared to traditional Venturi systems, thanks to the particular arc shape of the nozzle and the homogeneous flow of the air generated, which allows you to stand closer to the paint support;
- more efficient; 50% reduction in air consumption;
- more practical; 30% weight reduction and 15% noise reduction.

Fan Jet is available in manual version, manual with a practical magnetic coupling system, or in a comfortable and versatile support adjustable in height and inclination.

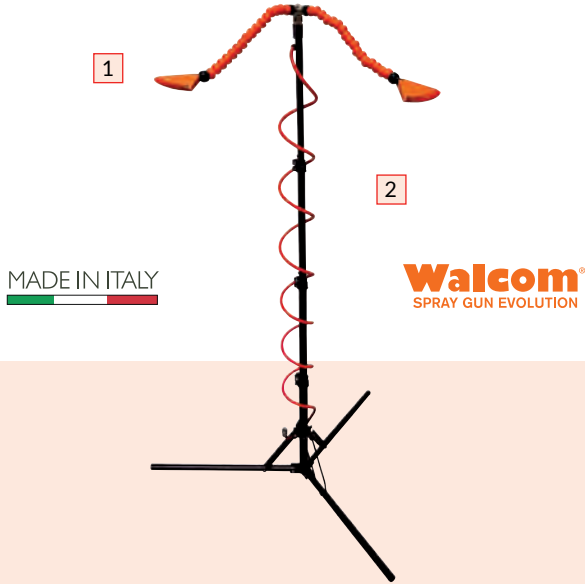

1 - FAN JET

Fan Jet with radial nozzle in nylon and thermoplastic rubber.

2 - STRUCTURE

Stand structure adjustable in height and angle, with practical adjustable arms.

ITEM ID DESCRIPTION

FAN JET

60150/BP Gun for drying at 70° of the continuous flow base, equipped with an air regulator.

Blowing distance:

- 30-40 cm in the first stage;
- 10-20 cm in the final drying.

Body: metallic

Nozzle: nylon and rubber radial pattern

Air consumption: 900 l / min at 6 bar / 31 cfm at 87 psi

Weight: 140 g

Recommended use



FAN JET MAGNETIC

60150/MAG Gun for drying at 70°, continuous flow base, equipped with an air regulator.
Version with magnet 18x18 mm for a practical and easy to attach to the cabin walls.

Blowing distance:

- 30-40 cm in the first stage;
- 10-20 cm in the final drying.

Body: metallic

Nozzle: nylon and rubber radial pattern

Air consumption: 900 l / min at 6 bar / 31 cfm at 87 psi

Weight: 150 g

Recommended use



FAN JET STAND

60167 Support for 2 Fan Jet nozzles for the base withering at 70°.

Blowing distance:

- 30-40 cm in the first seconds;
- 10-20 cm in the next stage.

Structure: aluminum

Height: adjustable from 50 to 170 cm


Tilt: adjustable from 0° to 360°

Nozzle: nylon and rubber sunburst

Air consumption: 980 l/min at 6 bar 42 cfm at 87 psi / 34 cfm at 87 psi

Weight: 4.5 Kg

Recommended use

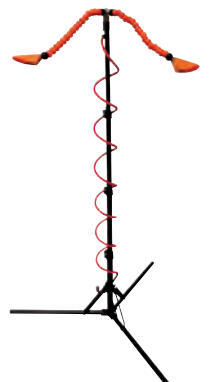

ECODRY LINE

The Ecodry line includes the range of quick water-based paint drying guns and systems.

Ecodry, exploiting the Venturi system, can increase the emitted air volume by about 15 times, thus significantly reducing drying time.

The enormous generated volume of air, in fact, associated with heat taken from the spray booth (20% mains air, 80% recycled air), allows for the fast evaporation of water residue.

The range now also includes a LIGHT version made of insulating antistatic thermoplastic material for lightweight and heatproof work.

IMPORTANT: work with perfectly filtered air to avoid the infiltration of impurities that could compromise finish quality.

MADE IN ITALY



Walcom®
SPRAY GUN EVOLUTION

1 - NUT

Air flow regulation nut

2 - BODY

Body fully made of nylon for lighter, more practical work.

3 - REGULATION

Air flow regulator for higher use precision.

ITEM ID DESCRIPTION

ECODRY

60125 Aluminum blower gun to dry waterborne paint, adjustable flow-volume.

Blow distance:

40-50 cm from the surface, continuously moving the gun

Central body: anodised aluminum

Grip: nylon

Operating air pressure: 0.5-2 bar / 7.2 - 29 psi

Air consumption: 200-300 l/min / 7-10 cfm

Packaging: 1 pcs

Weight: 550 g

Recommended use



ECODRY LIGHT

60143 Super light nylon blower to dry waterborne paint, adjustable flow-volume.

Blow distance:

40-50 cm from the surface, continuously moving the gun

Body: nylon

Operating air pressure: 0.5-2 bar / 7.2 - 29 psi

Air consumption: 200-300 l/min / 7-10 cfm

Packaging: 1 pcs

Weight: 390 g

Recommended use



ECODRY STAND

60165 Aluminum support with 2 Ecodry light - D plug

60165/JP Aluminum support with 2 Ecodry light - JP plug

Ecodry stand dries any type of surface from 1 m distance.

Features: zinc steel structure, 4 anodized aluminum sustaining axis, adjustable.

Fittings: X 300 U- X400

Hose: poliurethane spirial hose

Packaging: 1 pcs

Maximum adjustment: L 160 x P 80 x H 250 cm

Weight: 9.1 Kg

Recommended use



SPRAY GUN CLEANER

The EASY series spray gun cleaners are used to manually clean spray guns and are the best and most convenient solution for those who want to create an area dedicated to spray gun cleaning.

Practical, essential and complete, the EASY gun cleaners are available in the /S versions for solvent paints and /W versions for water-based paints.


Spraygun cleaner EASY, it allows a proper cleaning and maintenance of your spraygun, really practical and safe, it helps to maintain your spraygun properly and ecofriendly.

The powerful thinner atomizer (water atomizer in the /W version), combines with proper operation, allow for the best results in spraygun clean and maintenance.



Walcom
SPRAY GUN EVOLUTION

MADE IN ITALY



Always use protective gloves during cleaning



1 - EXHAUST HOOD

This guarantees the absence of solvent and other fumes, additionally protecting the operator's health.

2- FLOW CHANNELS

Ecological and efficient, they work with the Venturi and gravity systems.

3 - WORK SURFACE

Ample and secure, it provides for efficient and fast work.

4 - BLOW GUN

To assist the operator in the spray gun cleaning phases.

ITEM ID DESCRIPTION

EASY/S

90061 Spray gun cleaner for solvent paints.

For more accurate spray gun cleaning in three phases:

- 1) atomized clean solvent flow
- 2) clean solvent flow
- 3) recycled solvent flow

Structure: zinc sheet

Dimension of washing tank: L 62 x P 36 x H 50 cm

Total dimensions cm: L 62 x P 36 x H 140 cm

Operating air pressure: 4.0-6.0 bar / 58 - 87 psi

Air consumption: 65 l/min / 2 cfm

Packaging: 1 pcs

Weight: 38 Kg

Recommended use



EASY/W

90062 Spray gun cleaner suited for water-based paints.

For more accurate spray gun cleaning in three phases:

- 1) atomized clean water flow
- 2) clean water flow
- 3) recycled water flow

Structure: stainless steel

Cleaning tank: stainless steel

Dimension of washing tank: L 68 x P 43 x H 50 cm

Total dimensions cm: L 68 x P 43 x H 145 cm

PA/6 cleaning assistant blow gun

Operating air pressure: 4.0 - 6.0 bar / 58 - 87 psi

Air consumption: 65 l/min - 2 cfm

Packaging: 1 pcs

Weight: 43 Kg

Recommended use



COMPRESSED AIR GUNS

Complete range of compressed air guns for efficiency and long term professional use in the body shop. From standard air compressed guns to those for mono-component soundproofing protective compounds, all are manufactured with a MOPLen body and the components are produced in brass and stainless steel. The new adjustable nozzle of the IA/L - FG allows to obtain different spray thickness according to the surface to be treated.



Walcom®
SPRAY GUN EVOLUTION

MADE IN ITALY

1 - NOZZLE

External mixing nozzle for event powder product distribution on the surface to be treated.

2 - CUP

Anodised aluminum cup for 1 l cans or cartridges with any thread.

3 - REGULATOR

Inlet air flow regulator to adjust the finish during work.

4 - SAFETY VALVE

Safety valve to permit the automatic release of any over-pressure.

ITEM ID DESCRIPTION

IM BODY

50242/W Protective soundproof application gun for under bodies, single components and protective waxes, equipped with a product flow regulator and inlet air flow regulator.

Nozzle:

1 short nozzle with fan

3 different types of atomising nozzles with 90 cm extensions

Cup: in anodized aluminum with internal thread cartridge holder and aluminum suction hose.

Operating air pressure: 5.0 - 8.0 bar / 72 - 118 psi

Packaging: 1 pcs

Weight: 2.1 Kg

Recommended use



AS/FG

40004/W Professional blow gun with flow delivery valve.

Body: moplén

Nozzle: nickel-plated brass

Operating air pressure: 6.0 bar / 87 psi

Packaging: 1 pcs

Weight: 200 g

Recommended use



COMPRESSED AIR GUNS

COMPRESSED AIR GUNS

ITEM ID DESCRIPTION

PC/NS-FG

30038 Gun for applying adhesives, fillers and silicone in cartridges.

Body: moplen
Cup: aluminum
Operating air pressure: 2 - 2.5 bar / 29 - 36 psi
Packaging: 1 pcs
Cartridge: L 22.5 cm - diam. min Ø 40 - diam. max Ø 50
Weight: 575 g

Recommended use



IA/L - FG

30022 Gun for applying monocomponent soundproofing protective compounds and protective wax polyurethane bases in 1 l tins - **Connector with European thread**

30022USA Gun for applying monocomponent soundproofing protective compounds and protective wax polyurethane bases in 1 l tins - **Connector with USA thread**

30022AM Gun for applying monocomponent soundproofing protective compounds and protective wax polyurethane bases in 1 l tins - **Connector with Southamerican thread**

Body: moplen
Nozzle: adjustable spray
Length of suction hose: 23 cm
Operating air pressure: 2 - 2.5 bar / 29 - 36 psi
Packaging: 1 pcs
Weight: 260 g

Recommended use



IA/BED LINER

30054 Gun for the application of two-component (catalyzed) soundproofing protective products with disposable cup - adapter M 16 x 1.5 (Genesi Carbonio EVO/Light - Slim Kombat) **WITHOUT REGULATOR****

30055 Gun for the application of two-component (catalyzed) soundproofing protective products with disposable cup - adapter M 16 x 1.5 (Genesi Carbonio EVO/Light - Slim Kombat) **WITH REGULATOR***

Body: moplen
Equipment supplied: disposable PPS® type cup adapter
Nozzle: adjustable spray
Operating air pressure: 2 - 2.5 bar / 29 - 36 psi
Packaging: 1 pcs
*Weight: 385 g - **Weight: 240 g

Recommended use



IA/LU - FG

30023 Gun for applying monocomponent soundproofing protective compounds and protective wax polyurethane bases in pre-packed tins - **Connector with European thread**

30023USA Gun for applying monocomponent soundproofing protective compounds and protective wax polyurethane bases in pre-packed tins - **Connector with USA thread**

30023AM Gun for applying monocomponent soundproofing protective compounds and protective wax polyurethane bases in pre-packed tins - **Connector with Southamerican thread**

Corpo: moplen
Featuring: 2 suction hoses (length of suction hose: 23 cm),
1 hose with special nozzle for spraying inside parts
(length extension hose: 60 cm)
Nozzle: adjustable spray
Operating air pressure: 2 - 2.5 bar / 29 - 36 psi
Packaging: 1 pcs
Weight: 300 g

Recommended use



TS

50244/W Gun for applying single component soundproofing protective compounds including polyurethane based compounds and protective waxes in pre-packed 1 l tins - **Connector with European thread**

50245/W Gun for applying single component soundproofing protective compounds including polyurethane based compounds and protective waxes in pre-packed 1 l tins - **Connector with USA thread**

50244AM/W Gun for applying single component soundproofing protective compounds including polyurethane based compounds and protective waxes in pre-packed 1 l tins. - **Connector with Southamerican thread**

Body: polished and nickel-plated metal with soft-touch rubber overprinting
Featuring: 60 cm long extension hose with special nozzle for spraying in box sections
Operating air pressure: 2-2.5 bar / 29 - 36 psi
Packaging: 1 pcs
Weight: 540 g

Recommended use



General sales conditions

Validity

The following standardised general sales conditions govern the sales agreements, and are integral part of our agreements even when orders are collected by fax, by phone, by e-mail, via internet or verbally.

The provisions, the conditions and any other incidental contractual negotiations, in the case they depart from these general conditions, must be stated and accepted in written, otherwise they will be invalid and without effectiveness.

This catalogue cancels and replaces the previous ones and it may be changed at any time without notice and without this entails any right by the Customers to receive compensation.

Offers and Finalisation of the Contract

Technical descriptions and pictures are reported purely as an indication of the characteristic of the product, but they are not in themselves promises or essential quality of the supplied Products and therefore they may be changed at any time up to the finalisation of the contract.

Requests for quotations (Offers) are not in any case a "confirmed sales order". Further to said requests, Walmec S.p.A. will proceed exclusively in order to provide the required information.

Offers made by Walmec S.p.A. are not binding for the seller. The order made by the customer is binding and irrevocable according to article 1329 Italian Civil Code and for a period of 8 (eight) days after its receipt. Walmec S.p.A. has the right to accept the order either by written confirmation or by starting the execution of the contract, by shipping the ordered Products. The contract is believed to be finalised at Walmec S.p.A.'s commercial offices, via Trieste 10, Santa Lucia di Piave, Treviso, Italy. All orders transmitted are always to be considered "subject to approval" by Walmec S.p.A.

Orders for a total value lower than EUR 500.00 (five-hundred/00) are not accepted, except in the case of orders made solely for spare parts which will only be despatched on cash in advance with carried prepaid.

Prices and Terms of Payment

Unless otherwise written agreement entered by the Parties, Walmec S.p.A. applies to the finalised contract prices quoted on its catalogues and on its price lists effective at the time of the receiving of the order. Prices are quoted net of V.A.T. due according to the Italian Law in force.

Title of Products sold is of Walmec S.p.A. until the full and total payment, and any down payment made will be retained as reimbursement of damages and expenses.

Invoices issued by Walmec S.p.A. must be settled within the written terms agreed by the Parties, at the creditor's domicile, according to Article 1182 Italian Civil Code, even if the payment is made by bill of exchange or cash order.

Being expired the stated payment term, Walmec S.p.A. is authorised to draw a bill without any notice.

In case of late payment beyond the terms agreed and specified on the invoice, interest will be charged and it will be equal to the legal interest rate increased by seven points and related expenses.

In case of late payment Walmec S.p.A. has the right to require the fulfilment of any pending order by asking either advance payment or cash on delivery.

Freight charges will be accrued on the invoice except different agreement by the Parties. Packaging is billed at cost and it is not accepted in return.

Delivery Terms

Walmec S.p.A., in case of orders of remarkable quantity, has the option to make partial delivery.

Delivery terms are never binding; a possible missed delivery either fully or partially, or a simple delay, does not constitute right to recover any damage unless it was explicitly agreed in written form and accepted by the Parties.

In case the Parties have written agreed the Customer will make a down payment, the delivery term starts from the receipt of the agreed sum.

Shipping Risks

Products are shipped with all the risks in charge of the Customer, even if the Products are sold free domicile. Unless otherwise agreed by the Parties in written form, Walmec S.p.A. ships the Products to the address indicated by the Customers.

If the shipment is delayed because of reasons attributable to the customer, the risk in the title or for deterioration of the Products is in charge of the customer starting from the day when Walmec S.p.A. informs the customer to be ready to the shipment of the Products.

In all cases of force-majeure events, such as strikes, stoppage of transport, etc., Walmec S.p.A. will be exempted by its duty concerning the shipment, whereas such events could not be claimed by the customer as reason to annul the order.

Walmec S.p.A. will not bear any responsibility for any possible shortage of materials or damages of the parcels due to shipment made using parcels or train packaging. We advise our customers to check the quantity of the goods and the shipment conditions before taking delivery of the Products.

Title Retention Agreement

Walmec S.p.A. has the title on the supplied Products up to the integral payment of the due amount and of any other sum due by the Customer for any reason.

Risks and responsibility related to the use of the supplied Products are in charge of the customer starting from the time of the delivery.

Guarantee for Product Defects

The customer, at the time of the delivery, has the burden to check if the supplied Products match with the submitted order both in quantity and quality and if they are free from defects noticed with a quick view using the normal diligence.

Complaints for damages caused by the transport shall be sent directly to the carrier at the time of the receiving of the Product by specific note on the forwarding agent's delivery note, giving notice to Walmec S.p.A. within and not later than 8 (eight) days. Being expired said term, products are considered received and accepted.

Walmec S.p.A. guarantees the conformity of the supplied Products according to what is reported in the catalogue. Products supplied are covered by 12 (twelve) months warranty period, starting from the delivery date, against construction and material defects. In any case the guarantee is not applicable if the customer is not able to prove having made a correct use, maintenance and preservation of the Products.

Walmec S.p.A. denies any liability for damages to persons, animals and things due to an inaccurate and improper use of the Products.

Repairs

Shipments for repairs must be delivered carriage paid to Walmec premises located in via Trieste 10, Santa Lucia di Piave, Treviso, Italy, and will be sent back DDU charging the freight costs on the invoice. Repairs made during the warranty period will be sent back DDU.

Applicable Law and Jurisdiction

Any dispute arising in connection with the present contract shall be finally settled in front of the Treviso Court. This contract is governed by the Italian Law.

WALMEC SPA
WALMEC ITALY HEADQUARTERS

VIA TRIESTE 10, 31025 - S.LUCIA DI PIAVE - (TV) - ITALY
TEL +39 0438 6611
FAX: +39 0438 661333
E-MAIL: WALMEC@WALMEC.COM
WEB: WWW.WALMEC.COM

PRODUCTION PLANT

VIALE DELLA VITTORIA 33, 24054 - CALCIO - (BG) - ITALY

